

# M116P

## 11.6" Intel® Pentium® N4200 強固型平板電腦



### KEY FEATURES

- Intel® Pentium® N4200 1.1GHz (渦輪高達 2.5 GHz) 處理器
- 11.6" 1920 x 1080 LED 面板, 直接光學貼合
- IP65 防水防塵, 帶有 MIL-STD-810G 堅固外殼
- 可選的集成1D/2D條碼閱讀器和用於數據收集的 HF RFID
- 具有熱插拔功能的可拆卸電池, 可實現全天的工作效率
- 802.11ac WiFi, BT 5.0, 4G LTE, GPS 無線連接




### SPECIFICATIONS

顯示器			
黏合技術	Optical Bonding for Sunlight Viewability	解析度	1920x1080
尺寸	11.6 inches	對比度	1000:1
面板亮度	850 nits	可視角	85,85,85,85
觸控種類	Projected Capacitive Multi Touch	能見度	Anti-Glare touch treatment
觸控模式	Hand/Rain, Glove, Stylus		
系統規格			
處理器	Intel® Pentium® N4200 1.1GHz (Turbo up to 2.5 GHz)	記憶體	4GB LPDDR4 8GB LPDDR4 (Optional)
儲存空間	128 GB SSD Additional storage available with micro SDXC card slot 256 GB SSD (Optional) 512 GB SSD (Optional)	以太網控制器	1 x RJ45-10/100/1000 GigaLAN port (Optional)
安全支援	Trusted Platform Module (TPM) 2.0 Kensington Lock	作業系統	Windows 10 IoT Enterprise (64 bit)
無線通訊網路	Support	藍牙	Support
無線廣域網路	4G LTE (Optional)	全球定位系統	GPS, GLONASS
無線射頻辨識	HF RFID reader 13.56 MHz (Optional)	感測器	Light sensor/ g-sensor / Gyro
智慧卡讀卡機	Smart Card Reader Comply with ISO7816-1.2.3 T=1 and T=Ø protocol (Optional)		
鏡頭			
前鏡頭	2MP front camera	後鏡頭	8MP rear camera with autofocus and LED light
機構			
外觀尺寸	300.67 x 201.97 x 22.5 mm	重量	1.4 kg
冷卻系統	Fanless design		
訊號埠			
USB埠	1 x USB 3.0 (Type A), 1 x USB 3.0 (Type C)	SD卡槽	1 x Micro SDXC slot
SIM卡槽	1 x Micro SIM card slot	影像	1 x Micro HDMI (Optional)
音訊	1 x Audio combo 3.5mm audio combo jack Built-in dual digital mic with noise cancellation 2 x 1 watt front-facing speakers	有線網路	1 x RJ45-10/100/1000 GigaLAN port (Optional)

指示燈	4x LED Indicator for Power, Battery, HDD, RF status	mini PCIe	1 x Mini PCIe for WWAN Module
底座接頭	1 x 19-pin docking connector		
<b>環境</b>			
工作濕度	10% to 90% RH, non-condensing	工作溫度	-20°C to 60°C (AC mode), -10°C to 50°C (Battery mode)
儲存溫度	-30°C to 70°C	衝擊	MIL-STD-810G Method 516.6 Procedure I
振動	MIL-STD-810G Method 514.6 Procedure I	IP防水等級	IP65 certified, dustproof and waterproof
落摔	MIL-STD-810G Method 516.6, 4 ft		
<b>認證</b>			
認證	CE, FCC		
<b>安全性</b>			
SOTI MobiControl	SOTI MobiControl Compliance	Kensington Lock	Kensington Lock Support
<b>控制</b>			
按鈕	1 x Power, 3 x function keys		
<b>電源</b>			
電池	Hot-swappable 7.7V typ. 5900 mAh Li-Polymer Battery (2S1P) Optional 7.4V typ. 10280 mAh Li-Polymer Battery (2S2P)	電池使用時間	Standard Battery: 8 hours
電源規格	19V DC	電源適配器	100-240V, 50-60Hz (19V DC)
<b>配件</b>			
配件	Adapter and Power Cord Capacitive Stylus Standard Battery	配件選配	Desk Dock (Optional) Vehicle Dock (Optional) Vehicle Cradle (Optional) Vehicle Charger (Optional) Battery Charger (Optional) High Capacity Battery (Optional) Hand Strap (Optional) VESA Mount Kit (Optional) Shoulder Strap (Optional) Carry Bag (Optional)
<b>條碼掃描</b>			
配件	1D/2D barcode reader (Optional)		

## DIMENSIONS UNIT:MM

### Winmate M116P

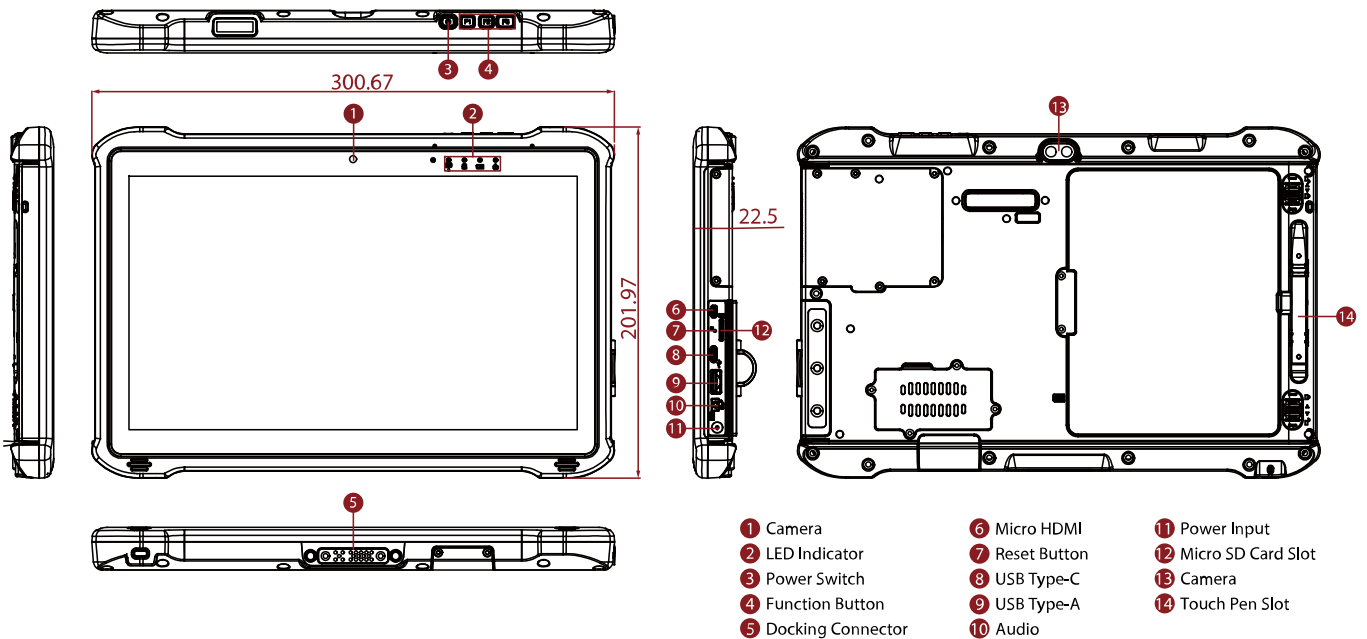

## NOTE

1. Total usable memory will be less dependent upon actual system configuration.
2. The USB Type-C connector follows USB 3.0 standard, which does not support Alternate Mode (ALT) or USB Power Delivery (USB-PD).
3. Add-on modules require the expansion port option to be usable.
4. TPM 2.0 is available upon request.
5. SOT1 is available upon request.
6. Measured at dimming LCD brightness. Varies depending on the usage conditions, or when an external device is attached.
7. Length measurements do not include protrusions. Weight varies with options and active pen.
8. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.
9. This is a simplified drawing and some components are not marked in detail.