

M133WKU

13.3" Intel® Core™ i5-8265U 超強固型平板電腦



KEY FEATURES

- Intel® Core™ i5-8265U Whiskey Lake 處理器
- 13.3英寸1920 x 1080 IPS寬視角LED面板
- 鎂合金外殼, 全方位彈性橡膠
- 內置支架可用作提手(無限可調)
- 冷交換電池組
- IP65防水防塵
- 光學貼合技術
- TPM 2.0




SPECIFICATIONS

顯示器			
解析度	1920x1080	尺寸	13.3 inches
對比度	1000:1	面板亮度	500 nits
可視角	89,89,89,89	觸控種類	Projected Capacitive Multi Touch
黏合技術	Optical Bonding for Sunlight Viewability		
系統規格			
處理器	Intel® Core™ i5-8265U, 1.60 GHz (up to 3.90 GHz)	記憶體	4GB SODIMM DDR4-2400 8GB SODIMM DDR4-2400 (Optional) 16GB SODIMM DDR4-2400 (Optional)
儲存空間	Storage 1: 1 x 128GB M.2 SSD Additional storage available with SDXC card slot Storage 1 up to 1x 1TB M.2 SSD (Optional) Storage 2 up to 1x 1TB M.2 SSD (Optional)	以太網控制器	1 x RJ45-10/100/1000 Mbps LAN
安全支援	Trusted Platform Module (TPM) 2.0 Kensington Lock	作業系統	Ubuntu 18.04
無線通訊網路	Support	藍牙	Support
無線廣域網路	4G LTE (Optional)	全球定位系統	GPS/GLONASS (Optional)
機構			
外觀尺寸	338.2 x 240 x 30 mm (13.3 x 9.4 x 1.18 inches)	重量	2.2kg (w/ kickstand)
冷卻系統	Fanless thermal design		
訊號埠			
USB埠	4 x USB 3.0 Type A, 1 x USB 3.1 Type C	SD卡槽	1 x SDXC Slot
音訊	2 x 1 watt speaker	有線網路	1 x RJ45-10/100/1000 Mbps LAN
指示燈	4x LED Indicator for Power, Battery, SSD, RF status	底座接頭	1 x Docking connector
環境			
工作濕度	30% to 80% RH, non-condensing	工作溫度	-10°C to 50°C (14°F to 122°F)
儲存溫度	-20°C to 60°C (-4°F to 140°F)	衝擊	MIL-STD-810G Method 516.6 Procedure I
振動	MIL-STD-810G Method 514.6 Procedure I	IP防水等級	IP65 certified, dustproof and waterproof
落摔	MIL-STD-810G Method 516.6, 4 ft		
認證			

認證	CE, FCC		
安全性			
Kensington Lock	Kensington Lock Support		
控制			
按鈕	1 x Power, 1 x menu, 2 x volume key 3 x Programmable Function Keys		
電源			
電池	15.4V, typ. 5900 mAh Li-Polymer Battery (4S1P)	電池使用時間	More than 10 hours (BAPCo TabletMark v3)
電源規格	19V DC	電源適配器	100-240V, 50-60Hz / 19V DC
配件			
配件	Adapter and Power Cord Standard Battery Stylus Stand with Integrated Handle	配件選配	Vehicle Charger (Optional) Battery Charger (Optional) Desk Docking (Optional)

DIMENSIONS UNIT:MM

Winmate M133WKU

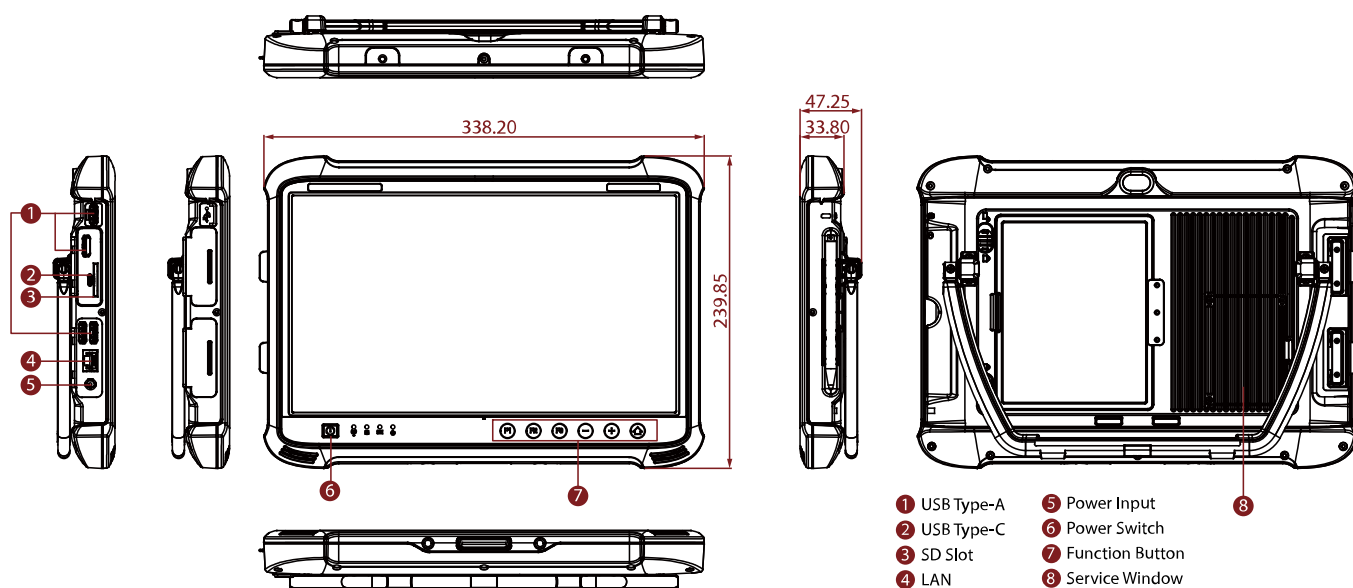

NOTE

1. Total usable memory will be less dependent upon actual system configuration.
2. TPM 2.0 is available upon request.
3. Length measurements do not include protrusions. Weight varies with options.
4. Measured at dimming LCD brightness. Varies depending on the usage conditions, or when an external device is attached.
5. This is a simplified drawing and some components are not marked in detail.
6. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.