

R08IP8M-RTU1ML

8.4" Intel® Pentium® N4200 軍規等級超強固型平板電腦



KEY FEATURES

- Intel® Pentium® N4200 Apollo Lake 處理器
- 8.4" 800 x 600解析度 半透射TFT-LCD面板
- 利用日光下可讀螢幕600 nits 光學貼合, 可提高清晰度和增強可讀性
- 生態密封保護端口和連接器免受潮氣和灰塵的侵害
- 可調節支架, 可轉換為手柄
- 鎂合金外殼, 全能彈性橡膠
- MIL-STD-38999連接器, 用於LAN / USB2.0, RS232 / RS422和DC 電源輸入




SPECIFICATIONS

顯示器			
解析度	800x600	尺寸	8.4 inches
對比度	600:1	面板亮度	600 nits
可視角	75,75,60,70	類型	Resistive Touch Screen
系統規格			
處理器	Intel® Pentium® N4200 Apollo Lake 1.1 GHz (up to 2.5 GHz)	記憶體	SO-DIMM, 4GB DDR3L 1866 MHz SO-DIMM, 8GB DDR3L 1866 MHz (Optional)
儲存空間	64GB M.2 SSD 128GB M.2 SSD (Optional) 256GB M.2 SSD (Optional) 512GB M.2 SSD (Optional)	安全支援	TPM 2.0
作業系統	Windows 10 IoT Enterprise 64bit	無線通訊網路	802.11 a/b/g/n/ac
藍牙	Support	無線廣域網路	4G/ LTE or 3G (Optional)
全球定位系統	Supports GPS GLONASS, Galileo, BeiDou (Optional)		
機構			
外觀尺寸	266 x 222 x 50 mm	重量	2.4 kg
外殼	Aluminum Magnesium Alloy Housing with Protective Rubber	冷卻系統	Fanless Design
電源			
電池	11.1V, 5200mAh Lithium-Ion Battery (6cells)	電池使用時間	8 Hours
電源規格	9-36V DC in (MIL-DTL-38999/1 connector)	電源適配器	100-240V, 50-60Hz / 19V DC
環境			
工作濕度	10% to 90% RH, non-condensing	工作溫度	-20°C to 60°C (AC mode), -10°C to 50°C (Battery mode)
儲存溫度	-30°C to 70°C (-22°F to 158°F)	衝擊	MIL-STD-810G Method 516.6 Procedure I
振動	MIL-STD-810G Method 514.6 Procedure I	IP防水等級	IP54
落摔	MIL-STD-810G Method 516.6, 4 ft		
認證			
認證	CE, FCC		

控制			
按鈕	1 x Power, 1 x Menu, 3 x Function Key, 2 x Brightness Control Key		
配件			
配件	Adapter and Power Cord Standard Battery Quick Start Guide Manual & Driver CD Touch Stylus MIL-STD-38999 cable for External connecting	配件選配	Adjustable Kickstand (Optional) Multi-functional Desktop Docking station (Optional) Vehicle Mounting Charger Kit (Optional) Car Power Charger (Optional) Hand Strap (Optional) Shoulder Strap (Optional) Soft Shell Case (Optional) Carry Bag (Optional)
訊號埠			
USB埠	2 x USB 3.0, 1 x USB 2.0(MIL-STD-38999 connector)	序列埠	1 x RS232/RS422 Serial COM Port(MIL-STD-38999 connector)
SD卡槽	1 x Micro SD Slot	SIM卡槽	1 x Micro SIM Card Slot
音訊	2 x 1 Watt Speaker	有線網路	1 x RJ45-10/100/1000 Mbps LAN(MIL-STD-38999 connector)
指示燈	4x LED Indicator for Power, Battery, SSD, RF status		
鏡頭			
前鏡頭	2MP Front Camera (Optional)	後鏡頭	5MP Rear Camera with auto-focus (Optional)

DIMENSIONS UNIT:MM

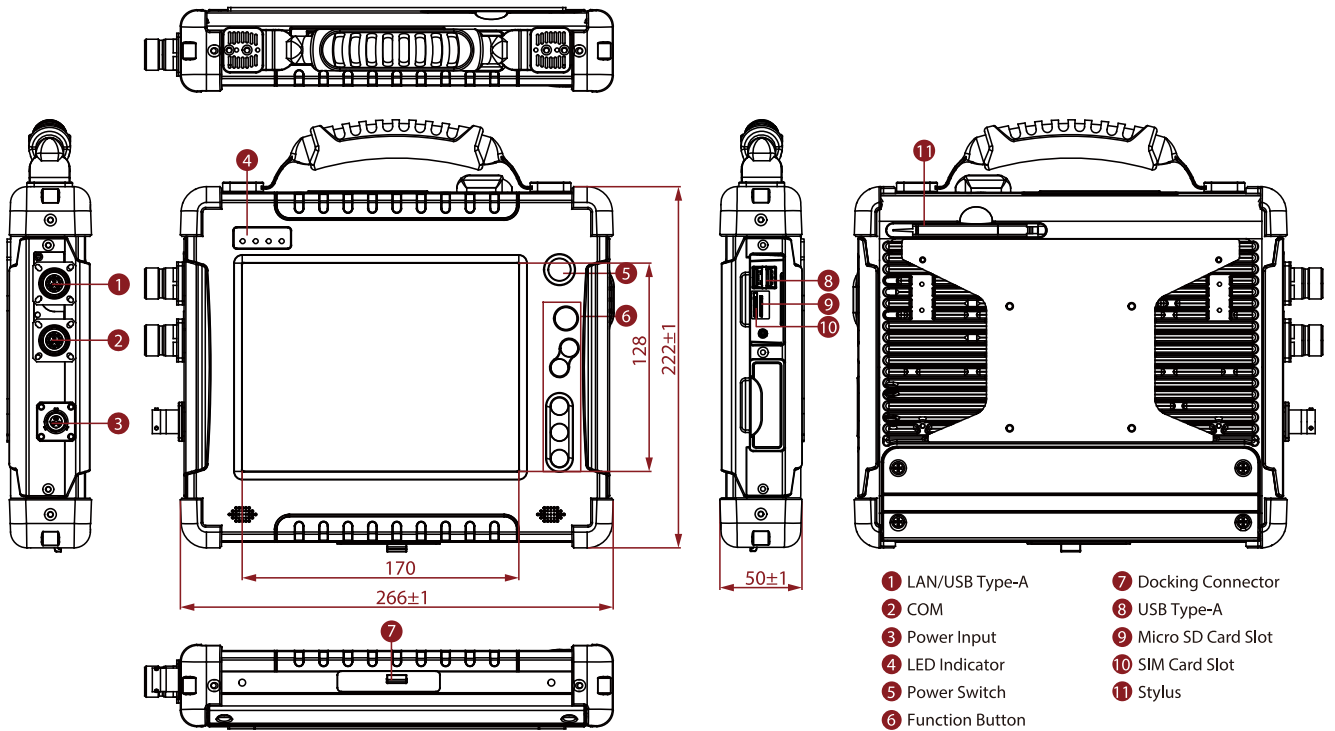

*MIL-STD-38999 connector for LAN/USB2.0, RS232/RS422 and DC Power Input.

NOTE

1. Measured at dimming LCD brightness. Varies depending on the usage conditions or when an external device is attached.
2. This is a simplified drawing, and some components are not marked in detail.
3. Default uses the silver military connector with RoHs, optional green military connector without RoHs.