

R08T200-VMU1

8.4" G-WIN VM系列顯示器



KEY FEATURES

- 高品質 8.4" 面板, 800 x 600 解析度, 600nits
- 5線/4線電阻式觸控螢幕
- -10 ~ +55°C 寬範圍工作溫度
- 無風扇設計的防腐蝕外殼
- 前面板IP65 防塵防水保護(I/O端口除外)
- 10 ~ 60V直流隔離寬範圍電源輸入。可選點火開關控制功能




SPECIFICATIONS

| 顯示器 | | | |
|------|----------------------------------------------------------------------------------------------------------------|--------|---------------------------------------------------------------------------------------------------------------------------------------|
| 解析度 | 800x600 | 尺寸 | 8.4 inches |
| 對比度 | 600:1 | 面版亮度 | 600 nits |
| 色階 | 262K Colors | 可視角 | 75,75,60,70 |
| 可視區 | 170.4x127.8 mm | 類型 | Resistive Touch Screen Protection Glass Without Touch Function (Optional) |
| 機構 | | | |
| 外觀尺寸 | 277 x 219.5 x 59.6 mm | 安裝 | VESA Mount Yoke Mount |
| 外殼 | Aluminum Housing | 冷卻系統 | Fanless design |
| 環境 | | | |
| 工作濕度 | 10% to 90% (non-condensing) | 工作溫度 | -10~55°C |
| 儲存溫度 | -30~70°C | 衝擊 | MIL-STD-810G Method 516.6 (Optional) |
| 振動 | MIL-STD-810G Method 514.6 | IP防水等級 | Front IP65 |
| 認證 | | | |
| 認證 | CE, FCC | | |
| 訊號埠 | | | |
| 電源輸入 | 1 x 10~60V DC, 3-Pin Terminal Block | USB埠 | 1x USB type-A for touch screen control (Optional) |
| 序列埠 | 1 x RS232 D-sub9 for touch screen control (Optional) | 影像 | 1x VGA input 1x HDMI input (Optional) |
| 指示燈 | 1 x LED Indicator for power 1 x LED Indicator for status | | |
| 控制 | | | |
| 按鈕 | 1 x Power Button 1 x Adjust up button 1 x Adjust down button 1 x ESC (Auto) button 1 x Menu button | | |
| 配件 | | | |
| 配件 | Open Wire Cable with terminal block connector External VGA cable Driver CD & Manual VESA screws | 配件選配 | Yoke mount stand (Optional) 100~240V AC to DC Adapter with power cord (Optional) External USB/COM cable for touchscreen control |

系統規格

DIMENSIONS UNIT:MM
Winmate R08T200-VMU1

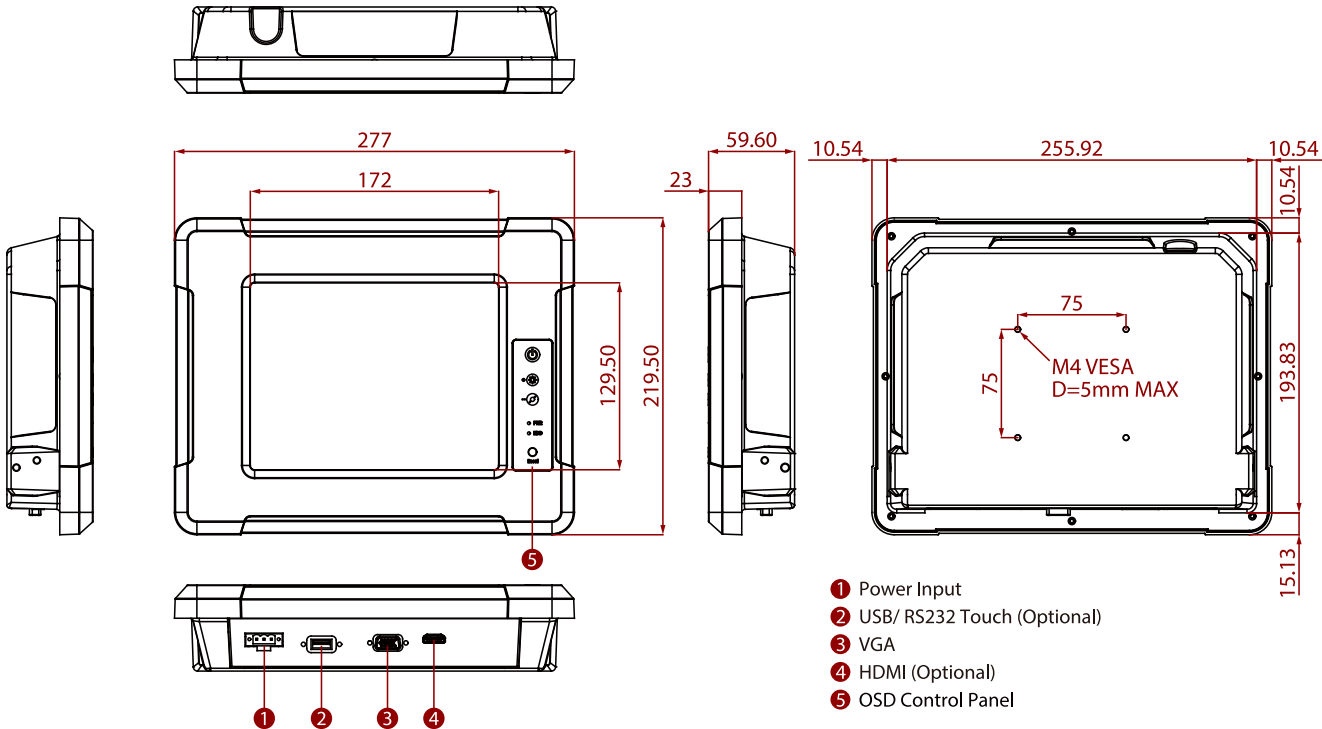

NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.
3. All specifications are subject to change without prior notice.