

R10IB3S-CHT2

10.4" Intel® Celeron® N2930機箱式工業電腦



KEY FEATURES

- 10.4" TFT XGA LCD
- Intel® Celeron® N2930 Quad Core 1.83 GHz 處理器
- SO-DIMM DDR3L 1600, max. 8 GB
- 集成 VGA, Dual-channel 24-bit LVDS, HDMI (可選)
- Intel® I210-AT GbE
- 1 x SATA, 1 x USB 2.0, 1 x USB 3.0, 1 x HDMI (可選), 2 x COM, 1 x Mini PCIe slot




SPECIFICATIONS

| 顯示器 | | | |
|------|--|-----------|--|
| 解析度 | 1024x768 | 尺寸 | 10.4 inches |
| 對比度 | 1000:1 | 面版亮度 | 350 nits |
| 可視角 | 88,88,88,88 | 可視區 | 210.4x157.8 mm |
| 類型 | Resistive Touch Screen Protection Glass Without Touch Function (Optional) | | |
| 系統規格 | | | |
| 處理器 | Intel® Celeron® N2930 (2M Cache, up to 2.16 GHz) | 記憶體 | 1 x SO-DIMM, DDR3L 1600 MHz, 4GB 8GB (Optional) |
| 儲存空間 | 1 x mSATA SSD 64GB. mSATA SSD up to 512GB. (Optional) | 以太網控制器 | 2 x Intel® Gigabit Ethernet Controller |
| 作業系統 | Windows 10 IoT Enterprise (Optional) Linux Ubuntu 18.04 (Optional) | 無線通訊網路 | Support (Optional) |
| 藍牙 | Support (Optional) | | |
| 機構 | | | |
| 外觀尺寸 | 270 x 225 x 60 mm | 安裝 | VESA Mount |
| 外殼 | Metal Housing | 冷卻系統 | Fanless design |
| 環境 | | | |
| 工作濕度 | 10% to 90% (non-condensing) | 工作溫度 | 0~50°C |
| 儲存溫度 | -10~60°C | | |
| 認證 | | | |
| 認證 | CE, FCC | | |
| 訊號埠 | | | |
| 電源輸入 | 1 x 12V DC, 2.5φ DC jack | USB埠 | 1 x USB3.0 (Type-A) 1 x USB2.0 (Type-A) |
| 序列埠 | 1 x RS232/422/485 (Default RS232) 1 x RS232 | 影像 | 1 x HDMI 1.4 (Optional) |
| 音訊 | 2 x Speaker | 擴充端口 | 1 x mPCIe slot(for half size Wifi module) |
| 有線網路 | 2 x Giga LAN RJ45 Connector | 指示燈 | 1 x LED Indicator for power 1 x LED Indicator for storage |
| 亮度旋鈕 | 1 x Brightness Adjustment Knob | mini PCIe | 1 x Mini PCIE(For WLAN) |

| | | | |
|-----------|--|-------|---------|
| 控制 | | | |
| 按鈕 | 1 x Power Button 1 x Reset Button | | |
| 配件 | | | |
| 配件 | 100~240V AC to DC Adapter Power Cord Driver CD & Manual VESA screws | | |
| 電源 | | | |
| 電源規格 | 12V DC | 電源適配器 | 12V 50W |

DIMENSIONS UNIT:MM

Winmate R10IB3S-CHT2

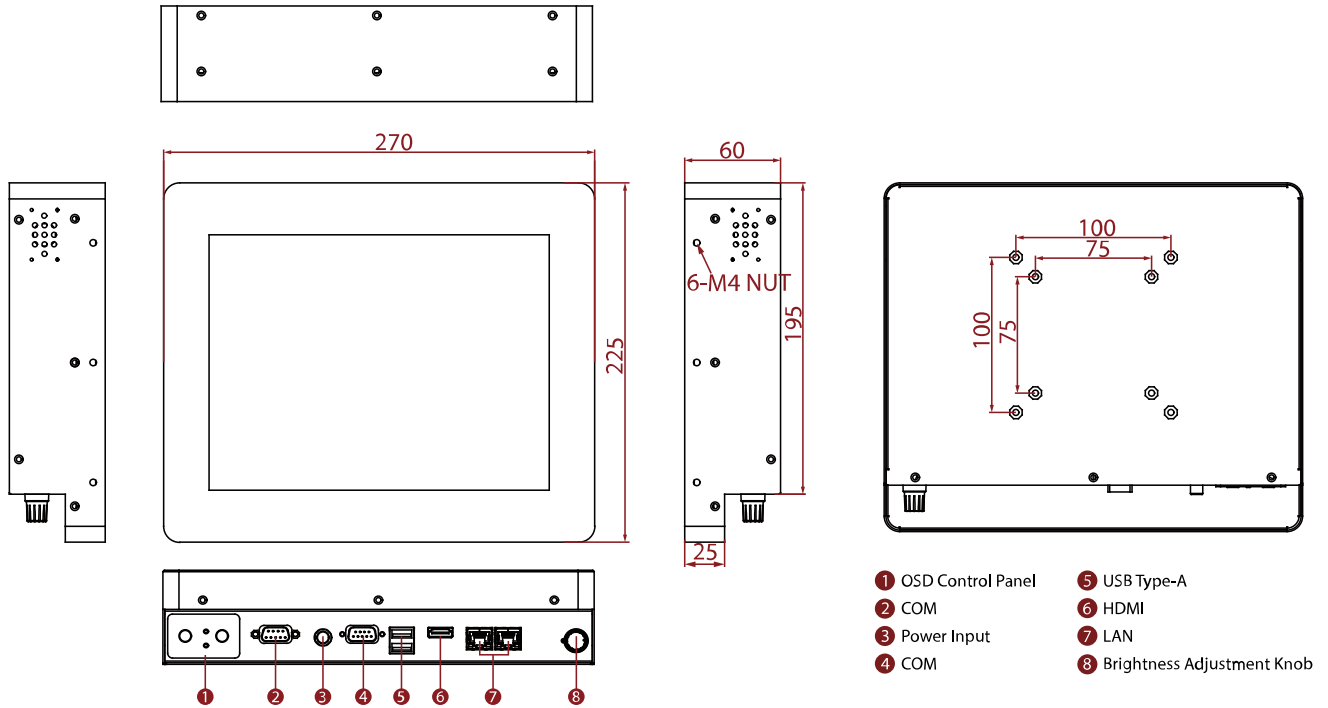

NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. All specifications are subject to change without prior notice.
3. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.