

R10IB3S-GST2

10.4" Intel® Celeron® N2930 G-WIN GS系列IP65防水電容式工業電腦



KEY FEATURES

- 10.4" 1024 x 768, P-CAP 觸控螢幕。
- Intel® Celeron® Bay Trail-M N2930 1.83 GHz。
- 無風扇冷卻系統和超低功耗。
- 邊緣到邊緣設計。
- 完整 IP65 設計, 帶有特殊的 M12 防水連接器。
- 1 x LAN, 1 x RS232, 1 x USB 2.0。



SPECIFICATIONS

| 顯示器 | | | |
|------|---|--------|--|
| 類型 | Projected Capacitive Multi Touch Screen | 解析度 | 1024x768 |
| 尺寸 | 10.4 inches | 對比度 | 1000:1 |
| 面版亮度 | 350 nits 1000 nits(Optional) | 可視角 | 88,88,88,88 |
| 可視區 | 210.4x157.8 mm | | |
| 系統規格 | | | |
| 處理器 | Intel® Celeron® N2930 (2M Cache, up to 2.16 GHz) | 記憶體 | 1 x SO-DIMM, DDR3L 1600 MHz, 4GB 8GB (Optional) |
| 儲存空間 | 1 x mSATA SSD 64GB. mSATA SSD up to 512GB. (Optional) | 以太網控制器 | 2 x Intel® Gigabit Ethernet Controller |
| 作業系統 | Windows 10 IoT Enterprise (Optional) Linux Ubuntu 18.04 (Optional) | 無線通訊網路 | Support (Optional) |
| 藍牙 | Support (Optional) | | |
| 環境 | | | |
| 工作濕度 | 10% to 95% RH | 工作溫度 | -15 °C to 55 °C |
| 儲存溫度 | -30°C to 60°C | 衝擊 | 40g for 11ms |
| 振動 | 1.48/1.90/2.24 g rms for XYZ/ 5-500Hz | IP防水等級 | Full IP65 |
| 認證 | | | |
| 認證 | Compliant with MIL-STD-810F/G for vibration / shock, CE, FCC | | |
| 訊號埠 | | | |
| USB埠 | 1 x USB 2.0 (M12 type) | 序列埠 | 1 x RS232 (M12 type)(Optional 422/485) |
| 有線網路 | 1 x LAN-10/100/1000 (M12 type) | 指示燈 | LED Indicators: Power, Storage |
| 機構 | | | |
| 外觀尺寸 | 252.41 x 197.8 x 43 mm | 安裝 | VESA Mount/ Panel Mount |
| 外殼 | Metal | 冷卻系統 | Fanless Design |
| 電源 | | | |
| 電源規格 | 12V DC (M12 type) | | |
| 配件 | | | |
| 配件 | Quick Start Guide (Hardcopy) | | |


Driver CD & User Manual
 M12 Power Cable
 M12 Serial Interface Cable
 M12 USB/ LAN Cable
 I/O Protective Cap x 3

控制

按钮 1 x Power Button
 1 x Reset Button

DIMENSIONS UNIT:MM

Winmate R10IB3S-GST2

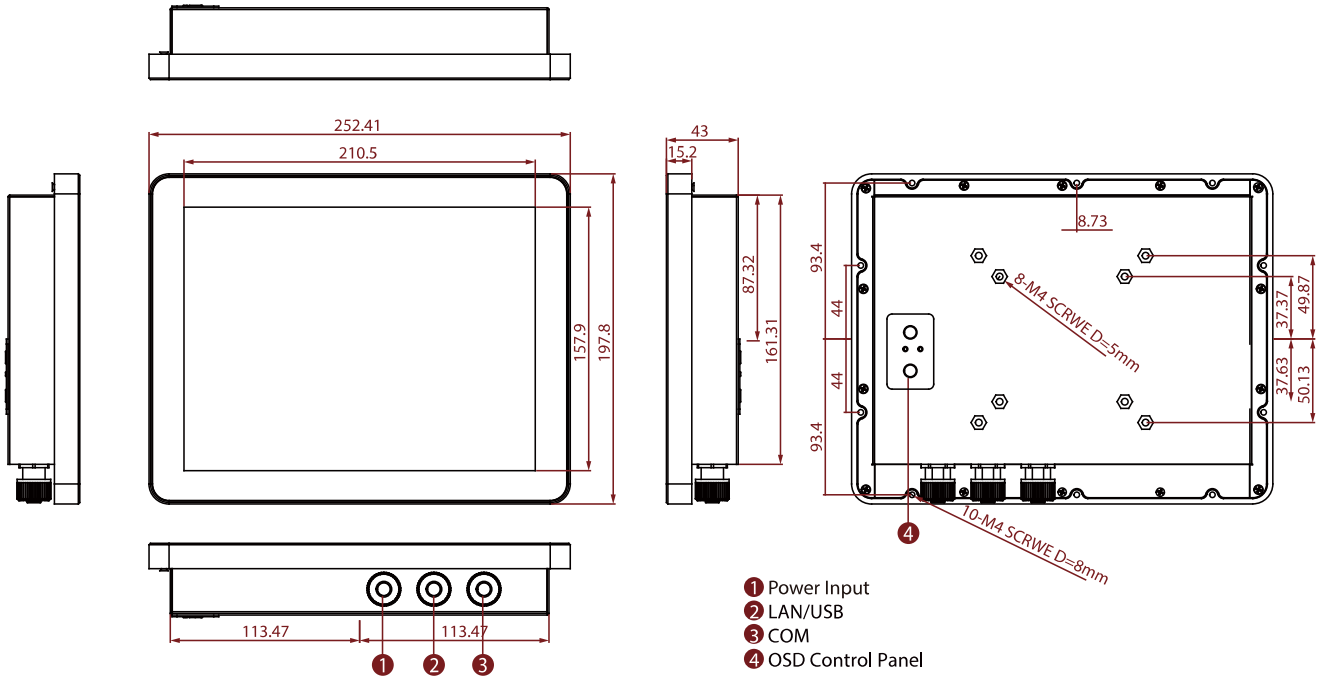

NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. Please contact our sales representative if you need further product information.
3. All specifications are subject to change without prior notice.
4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.