

R10L100-MLT2

10.4" G-WIN軍規等級顯示器



KEY FEATURES

- 10.4", 1024 x 768 解析度
- AR保護玻璃, 5線電阻式觸控螢幕(可選)
- 符合 MIL-STD 810G/ MIL-STD 461E
- 便捷的螢幕顯示控制
- 無風扇設計, 高效散熱
- 電源輸入 12 V DC 軍用級連接器(可選 936 V DC 寬範圍)
- 全 IP65 防塵防水外殼, I/O 部件除外
- 支持 VESA 安裝



SPECIFICATIONS


顯示器			
解析度	1024x768	尺寸	10.4 inches
對比度	1000:1	面版亮度	350 nits
色階	16.2M Colors	可視角	88,88,88,88
可視區	210.4x157.8 mm	類型	AR Protection Glass 5 Wires Resistive Touch (Optional) 5 Wire Resistive with EMI Mesh Filter (Optional) EMI Glass (Optional)
環境			
工作濕度	10% to 95% RH	工作溫度	-20°C~60°C
儲存溫度	-20°C~70°C	衝擊	Operating:30g for 18ms
振動	Operating: 1.60/1.96/2.18 g rms for XYZ / 5-500Hz		
符合法規			
MIL-STD 461E/F	RE101 / RE102 CE101 / CE102 with EMI Glass / Touch(Optional) RS101 / RS 103 CS101 / CS 106 / CS 109 / CS 114 / CS 115 / CS 116	MIL-STD 810F/G	Vibration Method 514.5 Humidity Method 507.4 Transit Drop Method516.5
認證			
認證	CE, FCC		
訊號埠			
序列埠	1x RS232 for Touch Screen (Optional)	影像	1 x VGA HDMI (Optional)
機構			
外觀尺寸	315.9 x 250.9 x 67 mm	安裝	VESA Mount
外殼	Metal Housing with Aluminum Bezel	冷卻系統	Fanless Design
配件			
配件	User Manual Touch Driver CD Open Wire Cable	配件選配	Mounting Bracket (Optional)
電源			

電源規格 12V DC (MIL-DTL-38999/1 connector)
9V to 36V wide range (Optional)

控制

按鈕 5 Keys: -, +, Power, Esc, Enter

DIMENSIONS UNIT:MM

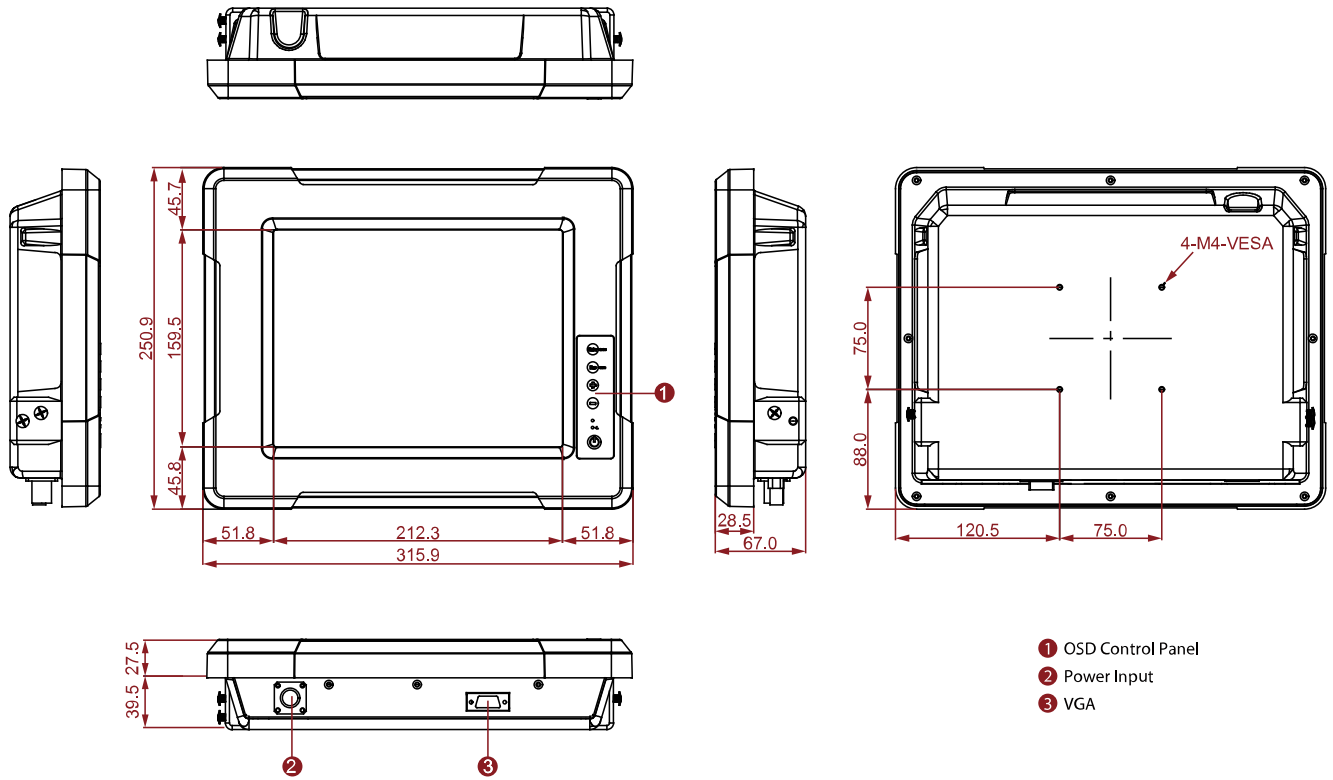

NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. Please contact our sales representative if you need further product information.
3. All specifications are subject to change without prior notice.
4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.