

# R10L100-VMT2(HB)

## 10.4" G-WIN VM系列顯示器



### KEY FEATURES

- 高品質10.4" SVGA面板, 1024 x 768解析度
- 前面板IP65 防塵/防水保護 (I/O 部件除外)
- 具有防腐蝕處理的鋁製外殼
- 抗衝擊和振動
- 符合MIL-STD-810G和IEC-60068227的標準
- 5線電阻觸控螢幕
- 防反射保護玻璃 (可選)
- 10 ~ 60V直流隔離寬範圍電源輸入。可選點火開關控制功能



### SPECIFICATIONS

| 顯示器               |  |        |   |
|-------------------|--|--------|---|
| 解析度               | 1024x768   | 尺寸     | 10.4 inches   |
| 對比度               | 1000:1   | 面版亮度   | 350 nits  |
| 色階                | 16.2M Colors   | 可視角    | 88,88,88,88   |
| 可視區               | 210.4x157.8 mm   | 類型     | Resistive Touch Screen<br>Protection Glass Without Touch Function<br>(Optional) |
| Optional function | High brightness Panel for sunlight readable<br>(Optional)  |        |   |
| 機構                |  |        |   |
| 外觀尺寸              | 315 x 250 x 67 mm  | 安裝     | VESA Mount<br>Yoke Mount  |
| 外殼                | Aluminum Housing   | 冷卻系統   | Fanless design  |
| 環境                |  |        |   |
| 工作濕度              | 10% to 90% (non-condensing)  | 工作溫度   | -10~55°C  |
| 儲存溫度              | -30~70°C   | 衝擊     | MIL-STD-810G Method 516.6 (Optional)  |
| 振動                | MIL-STD-810G Method 514.6  | IP防水等級 | Front IP65  |
| 認證                |  |        |   |
| 認證                | CE, FCC  |        |   |
| 訊號埠               |  |        |   |
| 電源輸入              | 1 x 10~60V DC, 3-Pin Terminal Block  | USB埠   | 1x USB type-A for touch screen control (Optional)                               |
| 序列埠               | 1 x RS232 D-sub9 for touch screen control<br>(Optional)  | 影像     | 1x VGA input<br>1x HDMI input (Optional)  |
| 指示燈               | 1 x LED Indicator for power<br>1 x LED Indicator for status  |        |   |
| 控制                |  |        |   |
| 按鈕                | 1 x Power Button<br>1 x Adjust up button<br>1 x Adjust down button<br>1 x ESC (Auto) button<br>1 x Menu button |        |   |
| 配件                |  |        |   |
| 配件                | Open Wire Cable with terminal block connector  | 配件選配   | Yoke mount stand (Optional)   |


External VGA cable  
Driver CD & Manual  
VESA screws

100~240V AC to DC Adapter with power cord  
(Optional)  
External USB/COM cable for touchscreen control  
(Optional)  
External HDMI cable (Optional)

## 系統規格

## DIMENSIONS UNIT:MM

### Winmate R10L100-VMT2

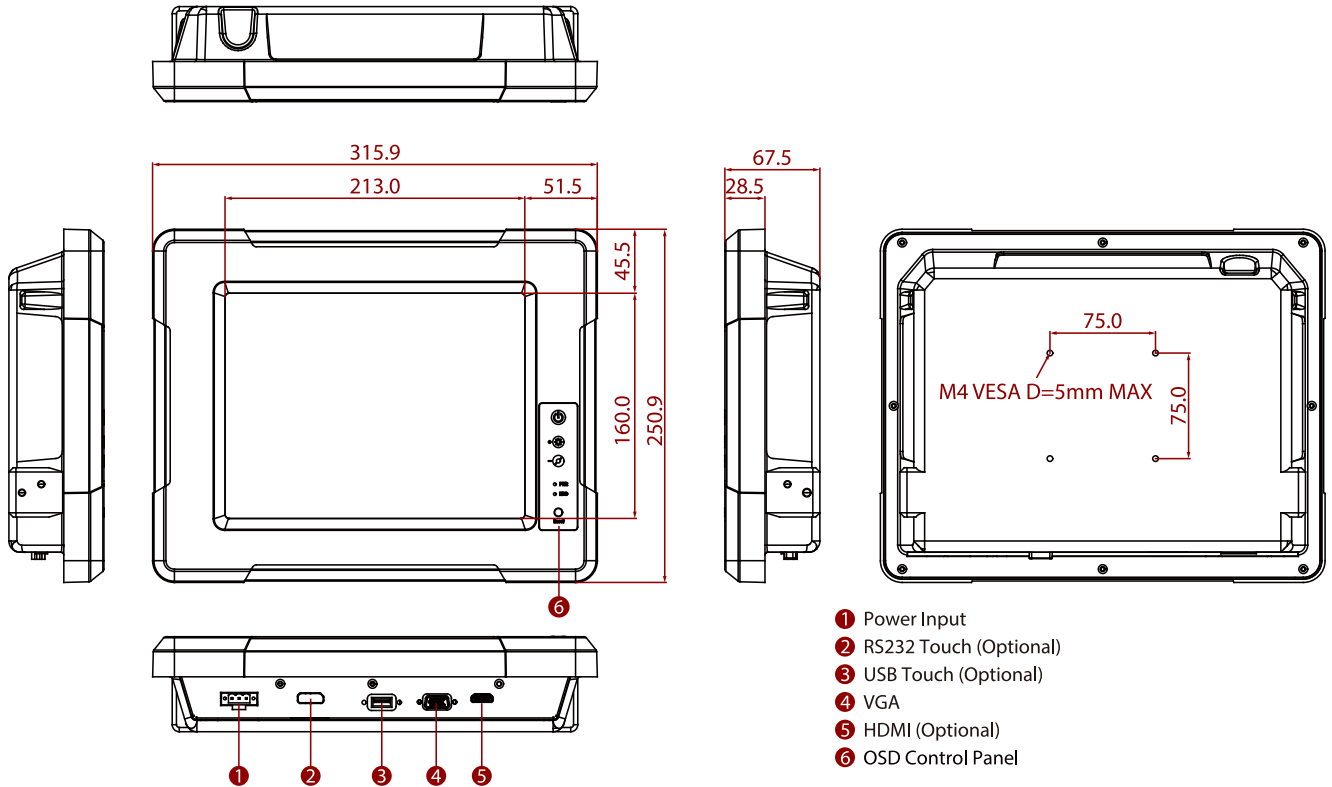

## NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.
3. All specifications are subject to change without prior notice.