

R12IB3S-GSM2(HB)

12.1" Intel® Celeron® N2930 G-WIN GS系列IP65防水電容式工業電腦



KEY FEATURES

- 12.1" 1024 x 768 分辨率, 投射電容式多點觸控(P-CAP)。
- Intel® Celeron® Bay Trail-M N2930 1.83 GHz。
- 無風扇冷卻系統和超低功耗。
- 邊緣到邊緣設計。
- 完整 IP65 設計, 帶有特殊的 M12 防水連接器。
- 1 x LAN, 1 x RS232, 1 x USB 2.0。



SPECIFICATIONS


顯示器			
類型	Projected Capacitive Multi Touch Screen Protection Glass (Optional)	解析度	1024x768
尺寸	12.1 inches	對比度	1000:1
面版亮度	500 nits 1000 nits(Optional)	可視角	89,89,89,89
可視區	245.76 x 184.32 mm		
系統規格			
處理器	Intel® Celeron® N2930 (2M Cache, up to 2.16 GHz)	記憶體	1 x SO-DIMM, DDR3L 1600 MHz, 4GB 8GB (Optional)
儲存空間	1 x mSATA SSD 64GB. mSATA SSD up to 512GB. (Optional)	以太網控制器	2 x Intel® Gigabit Ethernet Controller
作業系統	Windows 10 IoT Enterprise (Optional) Linux Ubuntu 18.04 (Optional)	無線通訊網路	Support (Optional)
藍牙	Support (Optional)		
環境			
工作濕度	10% to 95% RH	工作溫度	-15 °C to 55 °C
儲存溫度	-30°C to 60°C	衝擊	40g for 11ms
振動	1.48/1.90/2.24 g rms for XYZ/ 5-500Hz	IP防水等級	Full IP65
認證			
認證	Compliant with MIL-STD-810F/G for vibration / shock, CE, FCC		
訊號埠			
USB埠	1 x USB 2.0 (M12 type)	序列埠	1 x RS232 (M12 type)(Optional 422/485)
有線網路	1 x LAN-10/100/1000 (M12 type)	指示燈	LED Indicators: Power, Storage
機構			
外觀尺寸	296.2 x 226.7 x 45.5 mm	安裝	VESA Mount/ Panel Mount
外殼	Aluminum	冷卻系統	Fanless Design
電源			
電源規格	9-36V DC (M12 type)		
配件			

配件	Quick Start Guide (Hardcopy) Driver CD & User Manual M12 Power Cable M12 Serial Interface Cable M12 USB/ LAN Cable I/O Protective Cap x 3
控制	

按钮	1 x Power Button 1 x Reset Button
----	--------------------------------------

DIMENSIONS UNIT:MM

Winmate R12IB3S-GSM2(HB)

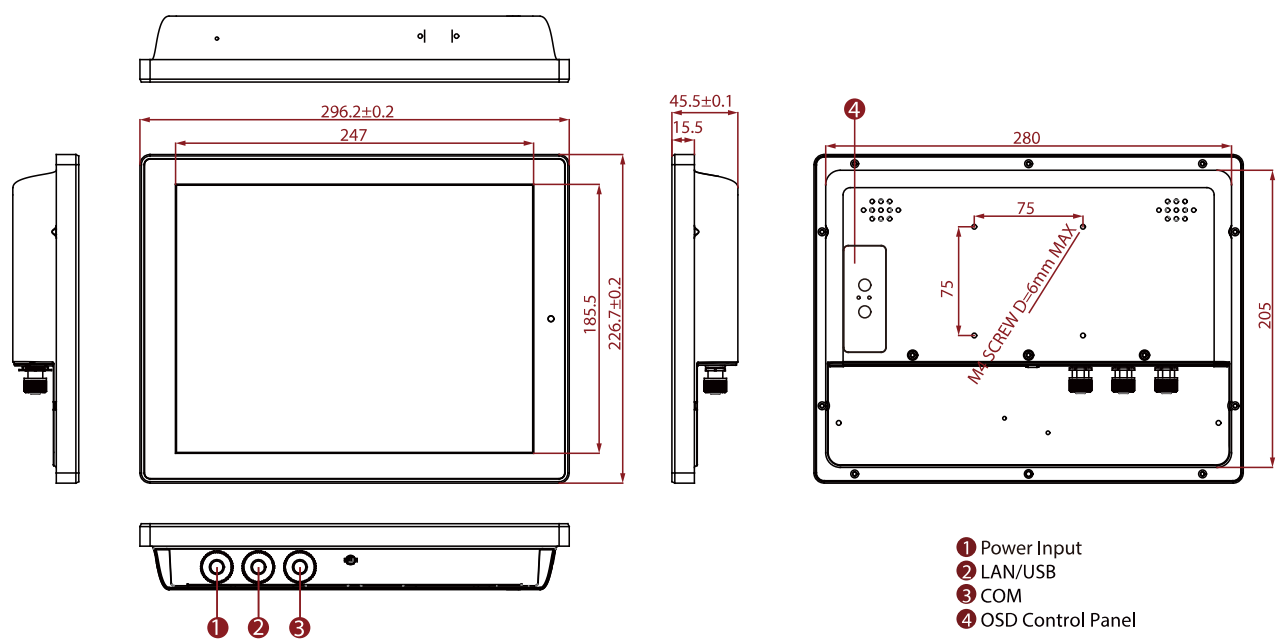

NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. Please contact our sales representative if you need further product information.
3. All specifications are subject to change without prior notice.
4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.