


# R12IP3S-PCM2AC-POE

12.1" Intel® Pentium® N4200 S系列人機介面工業電腦

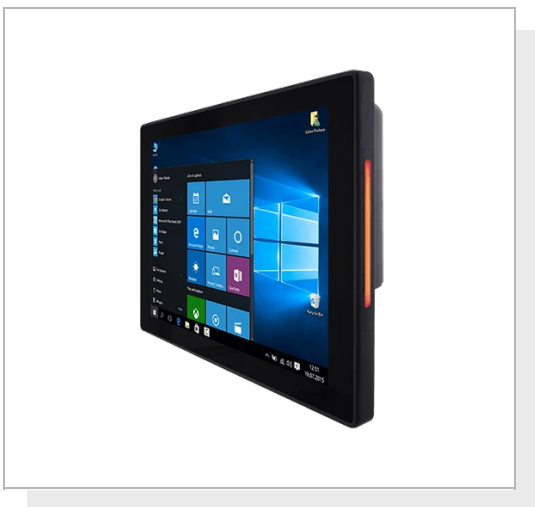

## KEY FEATURES

- 12.1 吋 1024 x 768 解析度, 配備投射式電容多點觸控 功能(PCAP)
- 無風扇冷卻系統和超低功耗
- 支持PoE功能
- 可選200萬像素前置攝像頭
- 可選的高頻RFID閱讀器
- 時尚的設計, 適用於房間預訂、門禁控制和房間信息應用。
- 前面板IP65防水防塵




## SPECIFICATIONS

顯示器			
解析度	1024x768	尺寸	12.1 inches
對比度	1000:1	面版亮度	500 nits
可視角	89,89,89,89	可視區	245.76 x 184.32 mm
類型	Projected Capacitive Multi Touch Screen		
系統規格			
處理器	Intel® Pentium® N4200 (2M Cache, up to 2.5 GHz)	記憶體	1 x SO-DIMM, DDR3L 1600 MHz, 4GB 8GB (Optional)
儲存空間	1 x M.2 B-Key 2242 SSD 128GB M.2 B-Key 2242 SSD up to 512GB (Optional)	以太網控制器	2 x Intel® Gigabit Ethernet Controller
安全支援	TPM 2.0	作業系統	Windows 10 IoT Enterprise (Optional) Linux Ubuntu 18.04 (Optional) Linux Ubuntu 20.04 (Optional)
無線通訊網路	Support (Optional)	藍牙	Support (Optional)
無線射頻辨識	HF RFID Reader 13.56 MHz (Optional)	Light Bar	Built-in RGB LED Status Light Bar, on both sides
機構			
外觀尺寸	296 x 227 x 46 mm	安裝	Panel mount VESA Mount
外殼	Metal Housing	冷卻系統	Fanless design
嵌入尺寸	282x207 mm		
環境			
工作濕度	10% to 90% (non-condensing)	工作溫度	0~50°C
儲存溫度	-20~60°C	IP防水等級	Front IP65
認證			
認證	CE, FCC		
訊號埠			
電源輸入	1 x 12V DC, 3-Pin Terminal Block	USB埠	2 x USB3.0 (Type-A)
序列埠	1 x RS232/422/485 (Default RS232)	影像	1 x Micro HDM (Optional)
音訊	1 x Speaker	擴充端口	2 x M.2 slot(1 for WiFi, 1 for SSD)
有線網路	2 x Giga LAN RJ45 Connector, One with PoE(PD, 802.3at)(Optional)		

配件			
配件	100~240V AC to DC Adapter Power Cord Terminal Block to 2.5Ø Female Adapter Cable Open Wire Cable with terminal block connector Driver CD & Manual VESA screws	配件選配	VESA Wall Mount (Optional) VESA Desk Stand (Optional) Glass Wall Mount Kit (Optional) Front Side Wall Mount (Optional) VESA bracket mounting kit (Optional)
電源			
電源規格	12V DC 10~60V (Optional)	電源適配器	12V 50W
POE	PoE (PD): follows IEEE 802.3at (25 W)		

## DIMENSIONS UNIT:MM

### Winmate R12IP3S-PCM2AC-POE

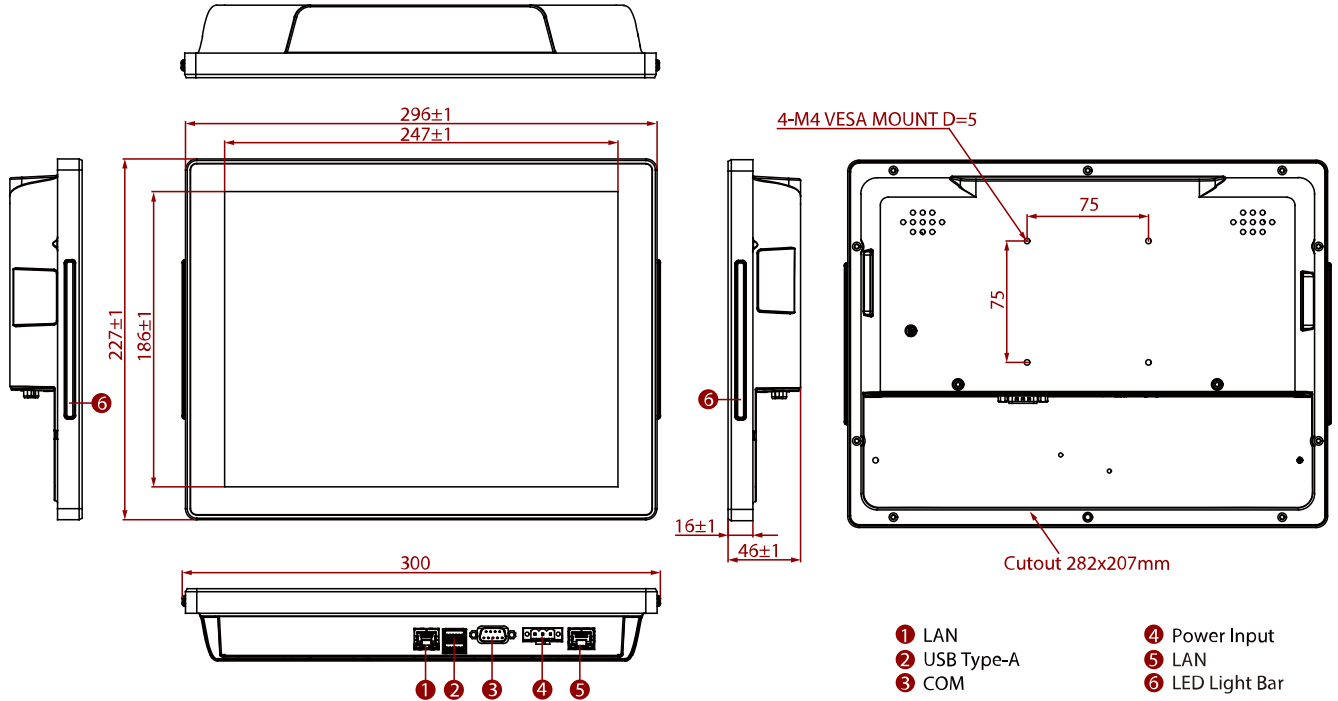

## NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.
3. All specifications are subject to change without prior notice.