

R12L100-GSM2(HB)

12.1" G-WIN GS系列顯示器



KEY FEATURES

- 12.1" 1024 x 768 解析度
- 投射電容式多點觸控(PCAP)
- 完整IP65防水防塵
- M12防水連接器
- 堅固耐用, 窄邊框設計




SPECIFICATIONS

顯示器			
類型	Projected Capacitive Multi Touch Screen Protection Glass (Optional)	解析度	1024x768
尺寸	12.1 inches	對比度	1000:1
面版亮度	500 nits 1000 nits(Optional)	色階	16.2M Colors
可視角	89,89,89,89	可視區	245.76 x 184.32 mm
環境			
工作濕度	10% to 95% RH	工作溫度	-15 °C to 55 °C
儲存溫度	-30°C to 60°C	衝擊	40g for 11ms
振動	1.48/1.90/2.24 g rms for XYZ/ 5-500Hz	IP防水等級	Full IP65
認證			
認證	Compliant with MIL-STD-810F/G for vibration / shock, CE, FCC		
訊號埠			
USB埠	1 x USB for Touch Screen	影像	1 x VGA
音訊	1 x Speaker		
機構			
外觀尺寸	296.2 x 226.7 x 45.5 mm	安裝	VESA Mount/ Panel Mount
外殼	Aluminum	冷卻系統	Fanless Design
配件			
配件	Quick Start Guide(Hardcopy) AC Adapter(For 7" Display only) M12 Power Cable(Not Supplied with 7" Display) VGA Cable USB for Touch Cable I/O Protective Cap x 3		
電源			
電源規格	9-36V DC (M12 type)		
控制			
按鈕	5 Keys: -, +, Power, Esc, Enter		

DIMENSIONS UNIT:MM

Winmate R12L100-GSM2(HB)

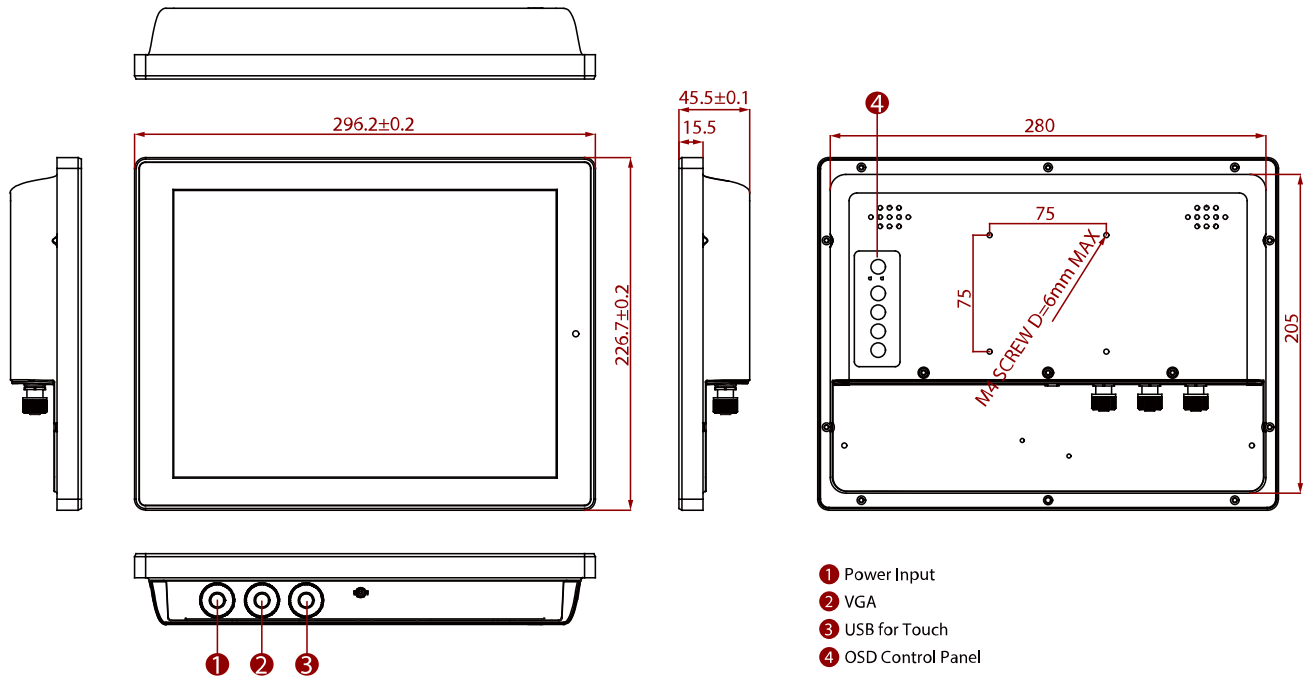

NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.
3. All specifications are subject to change without prior notice.