

R12L600-MRM2HB

12.1" 船舶等級高亮顯示器



KEY FEATURES

- 調光旋鈕可控制背光亮度從近 0% 到 100%
- 高亮度的TFT-LCD面板增強了最佳的可視性(可選)
- IP66鋁合金外殼, 帶粉末塗層設計(背面IP54)
- 可接受9至36V DC至DC電源輸入(可選AC電源)
- 高質量觸控螢幕 / AR保護玻璃可供選擇
- PIP(畫中畫)功能和多視頻輸入
- 易於使用的前面板 OSD 控制
- 增強的抗衝擊和振動性



SPECIFICATIONS


顯示器			
解析度	1024x768	尺寸	12.1 inches
對比度	1000:1	面版亮度	500 nits
色階	16.2M Colors	可視角	89,89,89,89
可視區	245.76 x 184.32 mm	類型	Resistive Touch Screen AR Glass (Optional)
環境			
工作濕度	5% to 95%	工作溫度	-15~55°C
衝擊	15G,11ms duration	振動	0.7g@DNVGL CG-0339 (Class A)
IP防水等級	IP66 (Front Side)		
認證			
認證	CE, FCC		
訊號埠			
序列埠	1 x RS232 for Remote Control 1 x RS232/USB for Touch Screen	影像	1 x VGA 1 x DVI-D 1 x Composite 1 x S-Video
機構			
外觀尺寸	337 x 293.2 x 70.8 mm	安裝	VESA Mount/ Panel Mount
外殼	Metal Housing with Aluminum Bezel	冷卻系統	Fanless Design
電源			
電源規格	24V DC-in with Isolation (Approval by Certificate) 9~36V DC Input Accpetable		
配件			
配件	1 x User Manual. 1 x CD for Touchscreen Driver Tools. 1 x DVI Cable. 1 x VGA Cable. 1 x RS232 Serial Cable. 1 x S-Video Cable. 1 x Composite Cable.		
控制			

按鈕

- 8 key:
- Esc/PIP
- Auto adjustment
- Left
- Right/Source
- OK/Menu
- Up
- Down
- Power
- 1 x The Dimming Knob

DIMENSIONS UNIT:MM

Winmate R12L600-MRM2(HB)

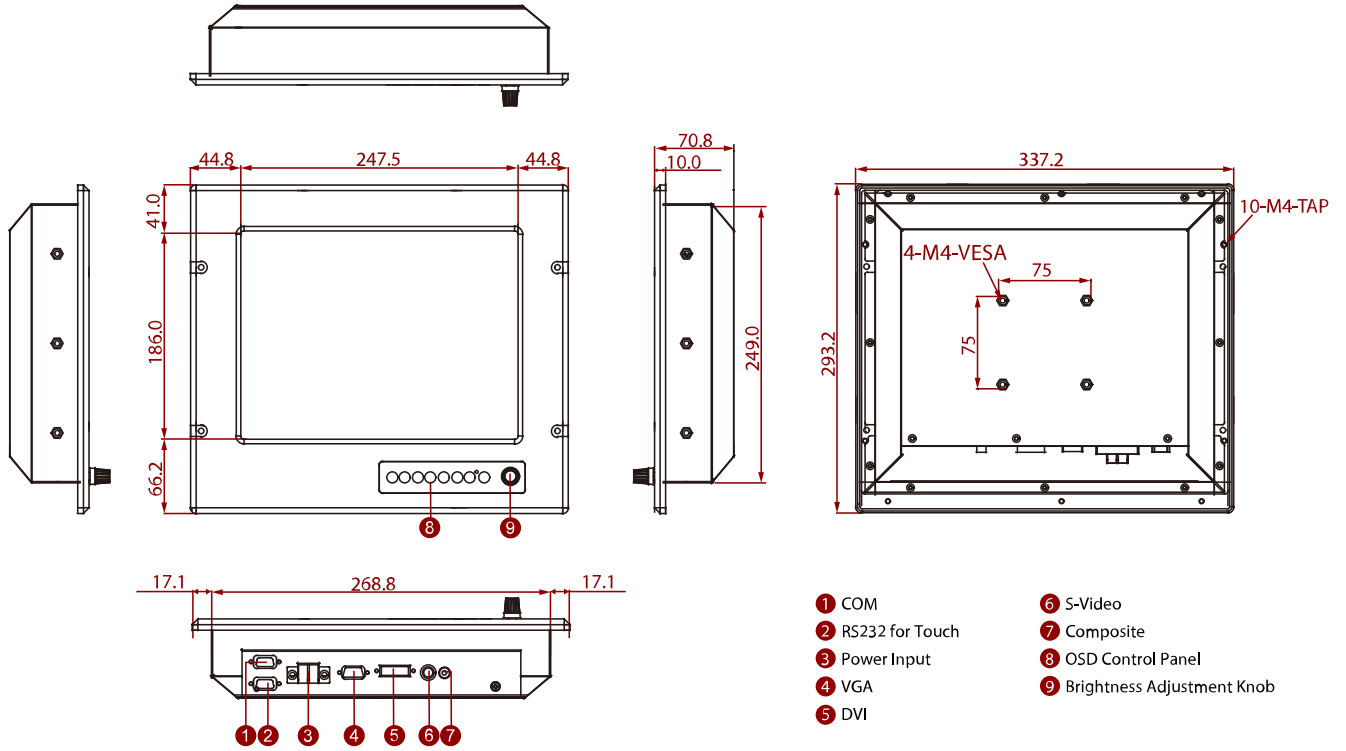

NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. Please contact our sales representative if you need further product information.
3. All specifications are subject to change without prior notice.
4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.