

R15FA3S-PTC3

15" NXP i.MX6 PT系列人機介面工業電腦



KEY FEATURES

- 15" 1024 x 768, 帶投射電容觸控螢幕
- NXP A9 i.MX6 雙核 1GHz 功耗低
- 無風扇冷卻系統和超低功耗
- 防護等級IP65, 防水防塵
- 真正的平坦, 易於清潔的前表面, 具有邊緣到邊緣的設計
- I/O 包括1xLAN, 1xRS232, 1xUSB 2.0, 1xUSB OTG, 1xCANBUS




SPECIFICATIONS

顯示器			
解析度	1024x768	尺寸	15.0 inches
對比度	800:1	面版亮度	350 nits
可視角	80,80,70,80	類型	Projected Capacitive Multi Touch Screen Anti-glare Coating (Optional)
系統規格			
處理器	NXP i.MX6 Dual Core, 1.0GHz	記憶體	1GB 2GB (Optional)
儲存空間	Onboard 16GB eMMC Onboard 32GB eMMC (Optional)	作業系統	Linux Ubuntu 18.04 (Optional) Android 6.0 (Optional) Debian 7.0 (Optional) Linux 4.1.15 QT 5.5 (Optional)
環境			
工作濕度	10% to 90% (non-condensing)	工作溫度	0~50°C
儲存溫度	-20~60°C	IP防水等級	Front IP65
認證			
認證	CE, FCC		
機構			
外觀尺寸	352.5 x 276.7 x 45 mm	安裝	VESA Mount (100x100mm, 75x75mm)
外殼	Plastic	冷卻系統	Fanless Design
訊號埠			
USB埠	1 x USB 2.0 1 x USB OTG – Connect to PC for Client Use and Update Image 1 x Mini USB– For Linux Debug	序列埠	1 x RS-232/422/485, 1 x CANBUS (DB9)
SD卡槽	1 x Micro SD Card Reader	音訊	2 x Speaker
有線網路	1 x RJ 45-10/100/1000 Mbps 1 x RJ 45-10/100/1000 Mbps with PoE (Optional)	指示燈	Power LED Indicator
配件			
配件	Driver CD Quick Start Guide(Hardcopy) AC Adapter 12V/50W Power Cord Terminal Block to DC Jack		

電源			
電源規格	12V DC in(Phoenix type)	POE	Power Device (PD), follows IEEE 802.3at (25 W)
控制			
按鈕	1 x Power Button 1 x Reset Button		

DIMENSIONS UNIT:MM

Winmate R15FA3S-PTC3

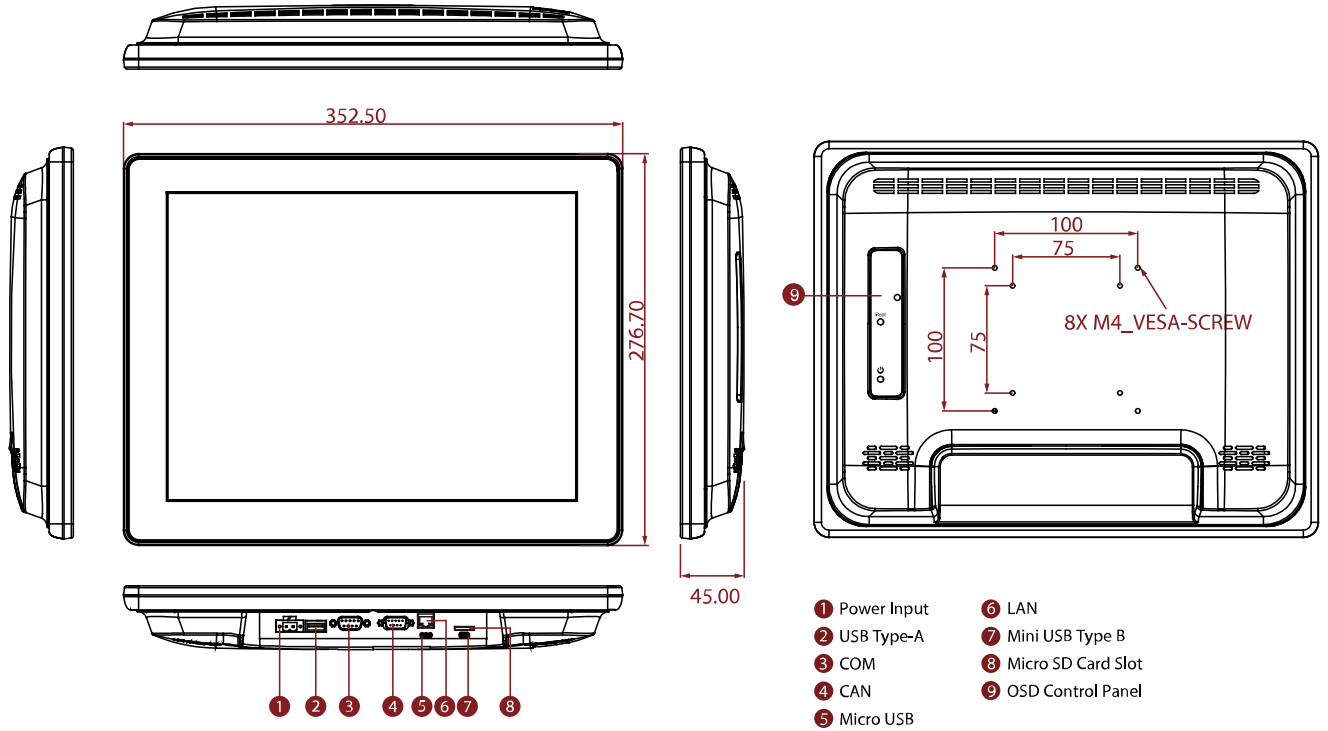

NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.
3. All specifications are subject to change without prior notice.