

R15IB3S-67C3(HB)

15" Intel® Celeron® N2930 G-WIN IP67系列工業電腦



KEY FEATURES

- Intel® Celeron® Bay Trail N2930 1.83GHz 處理器, 無風扇設計。
- 15" 高質量面板, 1024 x 768 解析度, 300 nits (可選 1000 nits)。
- IP67 防塵 / 防水設計, 帶 VESA 支架。
- 鋁壓鑄外殼, 具有防腐蝕處理。
- 內置環境光傳感器。
- 9 至 36V 寬範圍 DC 輸入, 帶隔離。
- 可選的 6-60V DC 輸入, 以及可選的點火開 / 關延遲。
- 5 線電阻觸控 / 防反射保護玻璃(可選)。
- 可選HB / 日光下最大可讀取 1000 nits。
- 設計符合 EN50155。



SPECIFICATIONS

系統規格			
處理器	Intel® Celeron® N2930 (2M Cache, up to 2.16 GHz)	記憶體	1 x SO-DIMM, DDR3L 1600 MHz, 4GB 8GB (Optional)
儲存空間	1 x mSATA SSD 64GB. mSATA SSD up to 512GB. (Optional)	以太網控制器	2 x Intel® Gigabit Ethernet Controller
作業系統	Windows 10 IoT Enterprise (Optional) Linux Ubuntu 18.04 (Optional)	無線通訊網路	Support (Optional)
藍牙	Support (Optional)		
顯示器			
解析度	1024x768	尺寸	15 inches
對比度	2000:1	面版亮度	300 nits
可視角	88,88,88,88	可視區	304.1x228.1 mm
類型	Resistive Touch Screen Bonding With Panel Protection Glass Without touch function (Optional)	Optional function	High brightness Panel for sunlight readable (Optional)
機構			
外觀尺寸	398 x 308 x 58 mm	安裝	VESA Mount Yoke Mount
外殼	Aluminum Housing	冷卻系統	Fanless design
環境			
工作濕度	10% to 90% (non-condensing)	工作溫度	-10~55°C -40~70°C (with intelligent heater) (Optional)
儲存溫度	-30~70°C	衝擊	MIL-STD-810G Method 516.6 (Optional)
振動	MIL-STD-810G Method 514.6	IP防水等級	IP67
認證			
認證	CE, FCC		
訊號埠			
電源輸入	1 x M12 waterproof connector for 9~36V DC	USB埠	1 x M12 waterproof connector for 2 x USB2.0
序列埠	1 x M12 waterproof connector for RS232	有線網路	1 x waterproof Giga LAN RJ45 connector
指示燈	1 x LED Indicator for power 1 x LED Indicator for storage		

控制

按鈕

- 1 x Power Button
- 1 x Reset Button
- 1 x Lock / Unlock front key function button
- 1 x Auto Dimming / Manually button
- 1 x Day / Night Mode button
- 1 x Brightness Up button
- 1 x Brightness Down button
- 1 x LED indicator brightness adjustment button
- 1 x Light sensor

配件

配件


- External open wire Power cable with waterproof connector
- External USB cable with waterproof connector
- External COM cable with waterproof connector
- External LAN cable with waterproof connector
- Waterproof caps
- RJ45 female-female converter
- Driver CD & Manual
- VESA screws

配件選配

- Yoke mount stand (Optional)
- 100~240V AC to DC Adapter with power cord (Optional)

DIMENSIONS UNIT:MM

Winmate R15IB3S-67C3(HB)

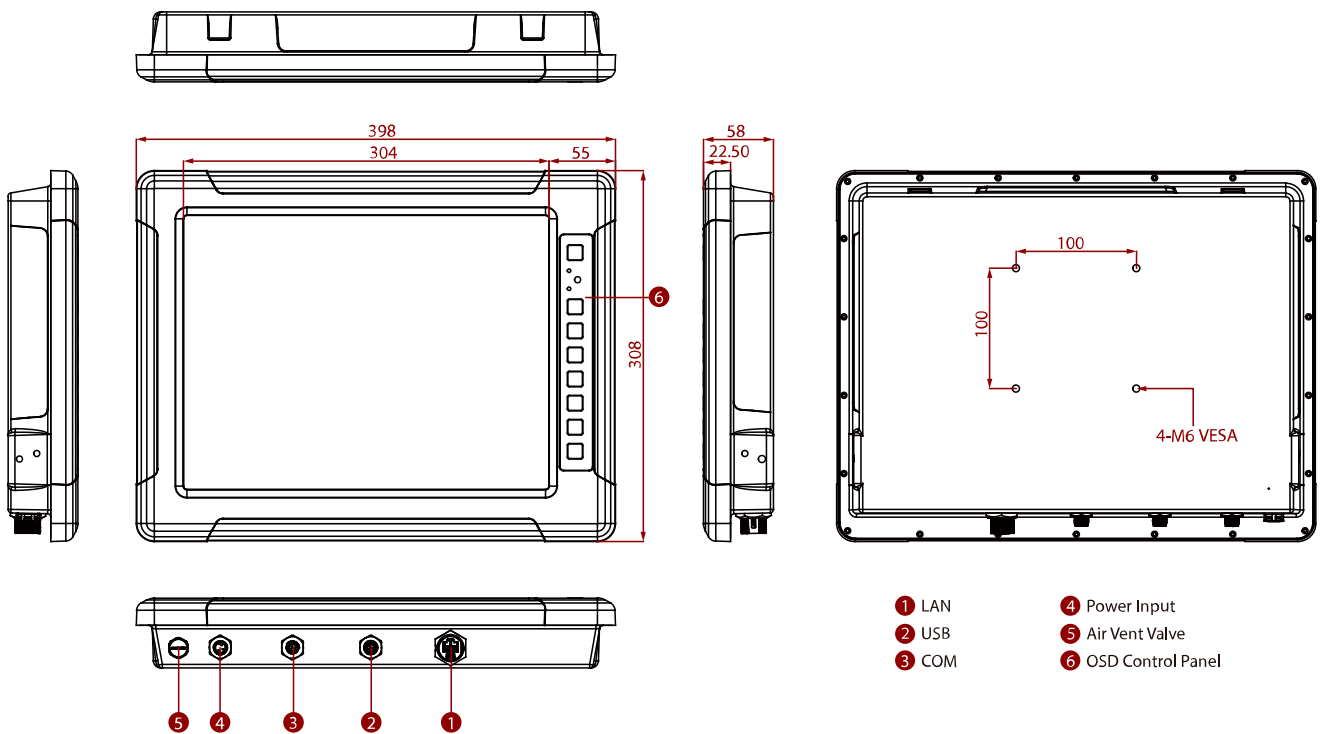

- 1 LAN
- 2 USB
- 3 COM
- 4 Power Input
- 5 Air Vent Valve
- 6 OSD Control Panel

NOTE

1. This is a simplified drawing and some components are not marked in detail.
3. Weight of the device varies by configuration.
4. Please contact our sales representative if you need further product information.
5. All specifications are subject to change without prior notice.
6. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.