

R15IB7T-CHA3WT

15" Intel® Celeron® N2930機箱式寬溫工業電腦



KEY FEATURES

- 15" TFT LCD
- Intel® Celeron® Bay Trail-M N2930, 1.83 GHz 處理器
- SODIMM DDR3L 1600/1333, max. 8 GB
- 2 x RS232, 1 x RS232/422/485, 1 x USB 3.0, 1 x USB 2.0, 2 x RJ45, 2 x PS/2, 1 x VGA, 1 x SATA II, 2 x Mini PCIe, 1 x eDP
- 正面IP65防水防塵
- -20~60°C 工作溫度




SPECIFICATIONS

顯示器			
解析度	1024x768	尺寸	15 inches
對比度	2500:1	面版亮度	500 nits
可視角	88,88,88,88	可視區	304.1x228.1 mm
類型	Resistive Touch Screen Protection Glass w/o Touch Function (Optional)		
系統規格			
處理器	Intel® Celeron® N2930 (2M Cache, up to 2.16 GHz)	記憶體	2 x SO-DIMM, DDR3L 1600 MHz, 4GB 8GB (Optional)
儲存空間	1 x mSATA SSD 64GB mSATA SSD up to 512GB (Optional) 1 x SATA II for 2.5" HDD (Optional)	以太網控制器	2 x Intel® Ethernet Controller I210-AT
作業系統	Windows 7 Embedded Systems (Optional) Windows 10 IoT Enterprise (Optional) Linux Ubuntu 18.04 (Optional)	無線通訊網路	Support (Optional)
藍牙	Support (Optional)		
機構			
外觀尺寸	360 x 290 x 79 mm	安裝	VESA Mount
外殼	Metal Housing	冷卻系統	Fanless design
環境			
工作濕度	30% to 90% (non-condensing)	工作溫度	-20~60°C
儲存溫度	-25~65°C		
認證			
認證	CE, FCC		
訊號埠			
電源輸入	1 x 12V DC, Din4 pin connector	USB埠	1 x USB3.0 (Type-A) 3 x USB2.0 (Type-A)
序列埠	1 x RS232/422/485 (Default RS232) 2 x RS232 1 x RS232 (Optional)	影像	1 x VGA
音訊	Mic in Line in Line out	擴充端口	2 x mPCIe slot

有線網路	2 x Giga LAN RJ45 Connector	指示燈	1 x LED Indicator for power 1 x LED Indicator for storage
亮度旋鈕	1 x Brightness Adjustment Knob	PS/2接口	2 x PS/2
mini PCIe	3 x Mini PCIE		
控制			
按鈕	1 x Power Button 1 x Reset Button		
配件			
配件	100~240V AC to DC Adapter Power Cord Driver CD & Manual VESA screws		
電源			
電源規格	12V DC	電源適配器	12V 50W

DIMENSIONS UNIT:MM

Winmate R15IB7T-CHA3WT

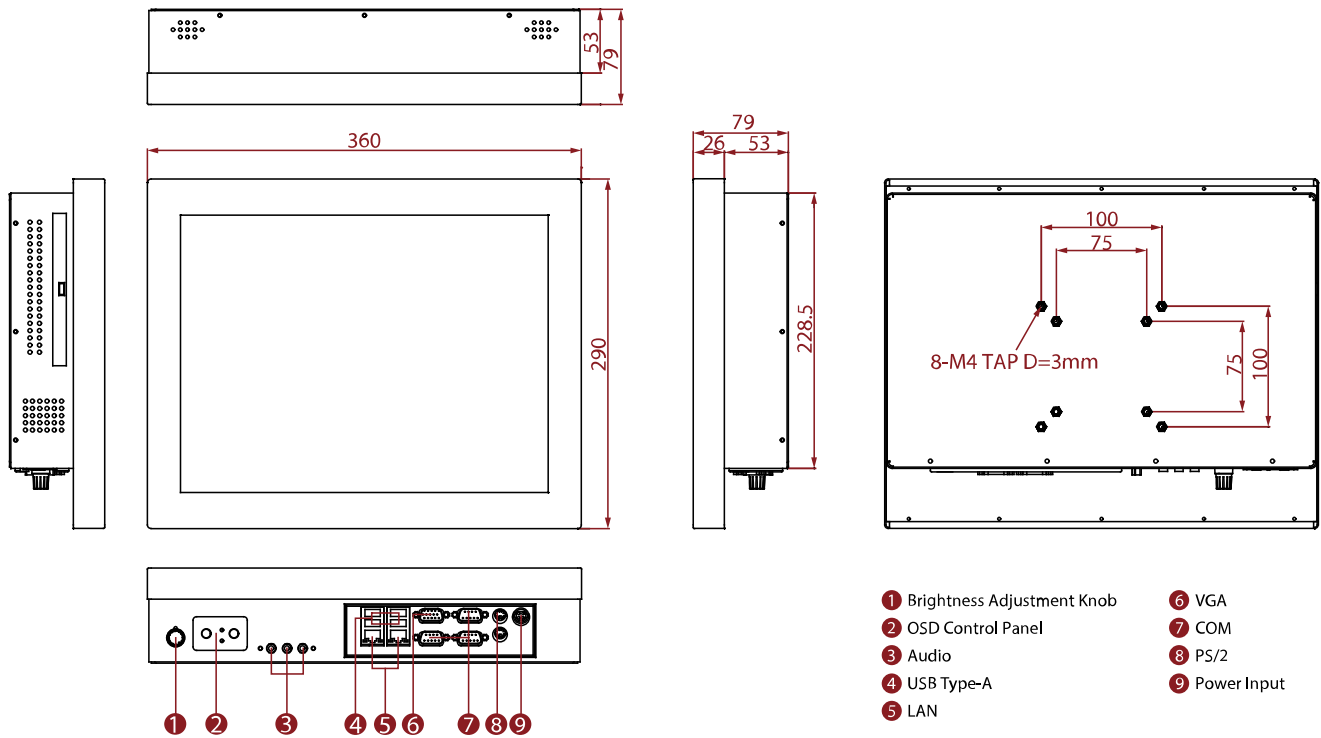

NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.
3. All specifications are subject to change without prior notice.