

R15L100-MRC3HB

15" 船舶等级高亮显示器



KEY FEATURES

- 調光旋鈕可控制背光亮度從近 0% 到 100%
- 高亮度 TFT-LCD 面板可增強可視性
- 面板(嵌入式)安裝座採用 IP66 鋁製外殼設計(背面 IP54)
- 可接受 9 至 36V DC 至 DC 電源輸入(可選 AC 電源)
- 高質量觸控螢幕 / AR保護玻璃可供選擇
- PIP(畫中畫)功能和多視頻輸入
- 易於使用的前面板 OSD 控制
- 增強的抗衝擊和振動性



SPECIFICATIONS


| | | | |
|------------|---|------|--|
| 顯示器 | | | |
| 解析度 | 1024x768 | 尺寸 | 15 inches |
| 對比度 | 2000:1 | 面板亮度 | 1000 nits |
| 色階 | 16.2M Colors | 可視角 | 88,88,88,88 |
| 可視區 | 304.1x228.1 mm | 類型 | Resistive Touch Screen AR Glass (Optional) |
| 環境 | | | |
| 工作濕度 | 5% to 95% | 工作溫度 | -15~55°C |
| 衝擊 | 15G,11ms duration | 振動 | 0.7g@DNVGL CG-0339 (Class A) |
| IP防水等級 | IP66 (Front Side) | | |
| 認證 | | | |
| 認證 | CE, FCC | | |
| 訊號埠 | | | |
| 序列埠 | 1 x RS232 for Remote Control 1 x RS232/USB for Touch Screen | 影像 | 1 x VGA 1 x DVI-D 1 x Composite 1 x S-Video |
| 機構 | | | |
| 外觀尺寸 | 412 x 345 x 79.7 mm | 安裝 | VESA Mount/ Panel Mount |
| 外殼 | Metal Housing with Aluminum Bezel | 冷卻系統 | Fanless Design |
| 電源 | | | |
| 電源規格 | 24V DC-in with Isolation (Approval by Certificate) 9~36V DC Input Accpetable | | |
| 配件 | | | |
| 配件 | 1 x User Manual. 1 x CD for Touchscreen Driver Tools. 1 x DVI Cable. 1 x VGA Cable. 1 x RS232 Serial Cable. 1 x S-Video Cable. 1 x Composite Cable. | | |
| 控制 | | | |

按鈕

8 key:
Esc/PIP
Auto adjustment
Left
Right/Source
OK/Menu
Up
Down
Power
1 x The Dimming Knob

DIMENSIONS UNIT:MM

Winmate R15L100-MRC3HB

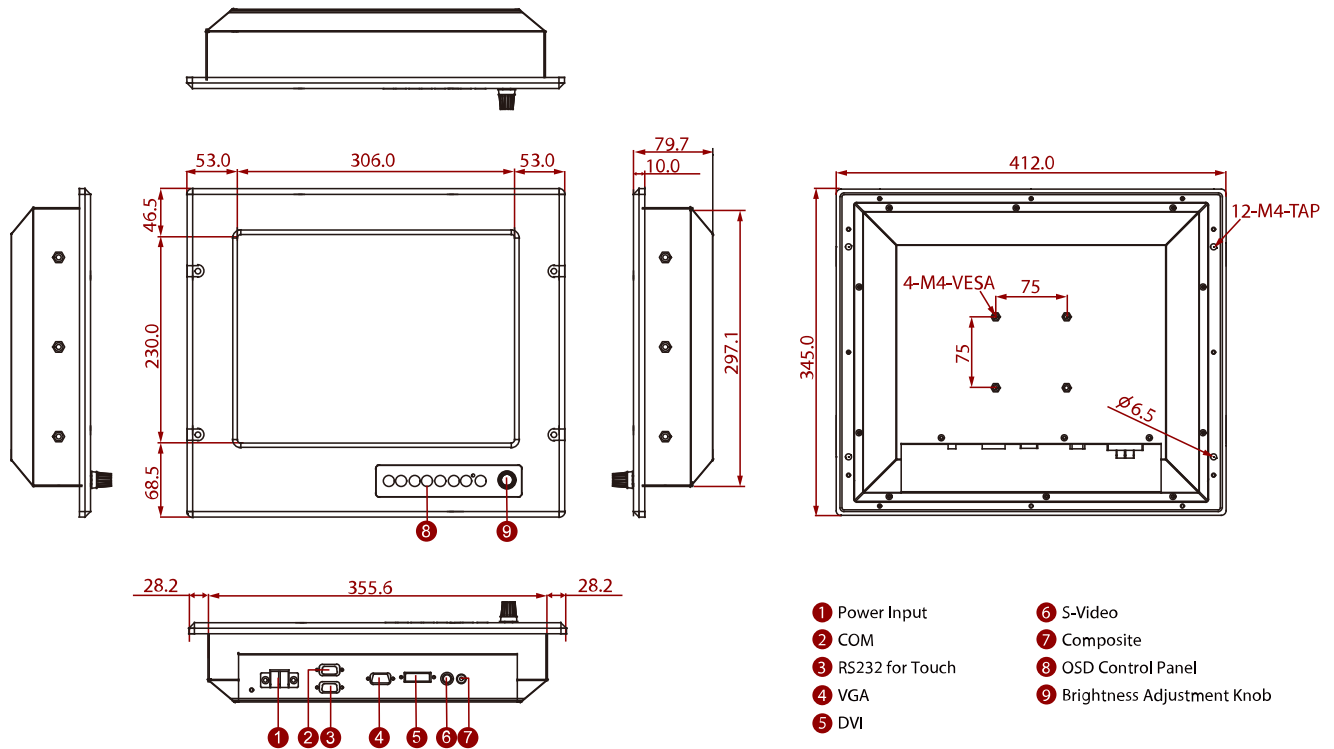

NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. Please contact our sales representative if you need further product information.
3. All specifications are subject to change without prior notice.
4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.