

# R15L100-SPC369-P1

## 15" P系列IP69K不銹鋼顯示器



### KEY FEATURES

- 15" 1024 x 768解析度 投射電容觸控螢幕
- 無風扇冷卻系統
- 用於食品和化學工業的SUS 316 / AISI 316不銹鋼
- 全IP69K防水外殼, 良好的耐腐蝕性
- 真正的平坦, 易於清潔的前表面, 具有邊緣到邊緣的設計
- 防水密封導管, 用於電纜保護
- 支持VESA安裝和Yoke安裝支架
- 光學貼合(可選)



### SPECIFICATIONS


顯示器			
解析度	1024x768	尺寸	15 inches
對比度	2000:1	面版亮度	300 nits
色階	16.2M Colors	可視角	88,88,88,88
可視區	304.1x228.1 mm	類型	Projected Capacitive Multi Touch Screen
機構			
外觀尺寸	378 x 301 x 56.2 mm	安裝	VESA Mount Yoke Mount
外殼	Stainless Housing	冷卻系統	Fanless design
環境			
工作濕度	10% to 90% (non-condensing)	工作溫度	0~45°C
儲存溫度	-20~60°C	IP防水等級	IP69K
認證			
認證	CE, FCC		
訊號埠			
USB埠	1x USB type-A for touch screen control	影像	1x VGA 1x HDMI (Optional)
指示燈	1 x LED Indicator for power 1 x LED Indicator for status		
控制			
按鈕	1 x Power Button 1 x Adjust up button 1 x Adjust down button 1 x ESC (Auto) button 1 x OK (Menu) button		
配件			
配件	1 x Waterproof Conduit 1.5m 1 x Waterproof Conduit 0.3m 2 x Elbow for connect the conduit 1 x AC to DC power adapter with power cord 1 x External USB cable for touchscreen control 1 x External HDMI cable 1 x D-sub15(male) to RJ45 adapter 1 x D-sub15(female) to RJ45 adapter 1 x External RJ45 male to male cable	配件選配	1 x Open wire cable for phoenix connector (Optional) Yoke mount stand kit (Optional)

電源

電源規格 12V DC input

**DIMENSIONS** UNIT:MM

**Winmate R15L100-SPC369-P**

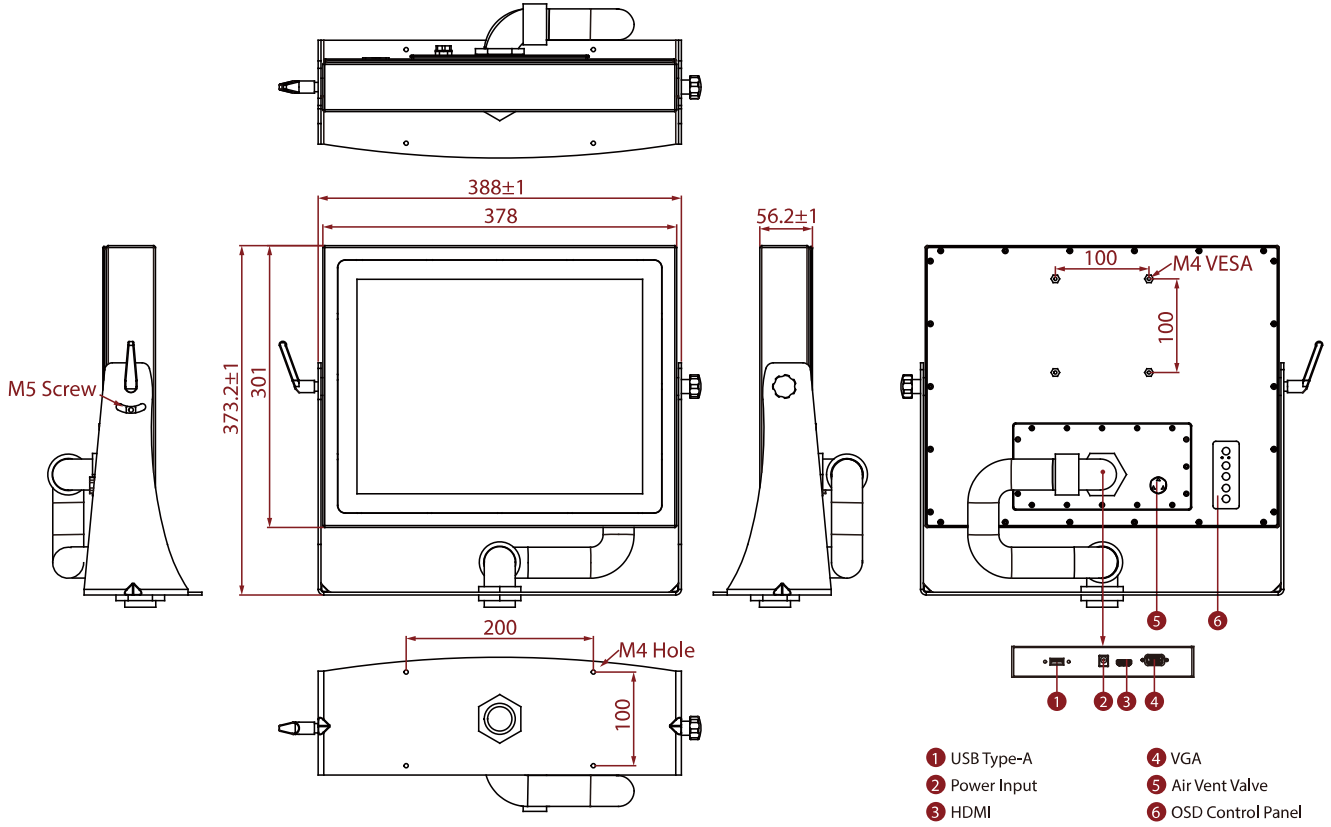

**NOTE**

1. This is a simplified drawing and some components are not marked in detail.
2. Please contact our sales representative if you need further product information.
3. All specifications are subject to change without prior notice.
4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.