

R15L100-VMC3(HB)

15" G-WIN VM系列顯示器



KEY FEATURES

- 高品質 15" XGA 面板, 1024 x 768 解析度
- 5線電阻觸控螢幕
- -10 ~ +55°C寬範圍工作溫度
- 無風扇設計的防腐蝕外殼
- 內置環境光傳感器
- 前面板IP65 防塵防水保護(I/O 端口除外)
- 10 ~ 60V直流隔離寬範圍電源輸入。可選點火開關控制功能



SPECIFICATIONS

顯示器			
類型	Resistive Touch Screen Protection Glass Without Touch Function (Optional)	Optional function	High brightness Panel for sunlight readable (Optional)
解析度	1024x768	尺寸	15 inches
對比度	2000:1	面板亮度	300 nits 1000 nits(Optional)
色階	16.2M Colors	可視角	88,88,88,88
可視區	304.1x228.1 mm		
機構			
外觀尺寸	398 x 308 x 58 mm	安裝	VESA Mount Yoke Mount
外殼	Aluminum Housing	冷卻系統	Fanless design
環境			
工作濕度	10% to 90% (non-condensing)	工作溫度	-10~55°C
儲存溫度	-30~70°C	衝擊	MIL-STD-810G Method 516.6 (Optional)
振動	MIL-STD-810G Method 514.6	IP防水等級	Front IP65
認證			
認證	CE, FCC		
訊號埠			
電源輸入	1 x 10~60V DC, 3-Pin Terminal Block	USB埠	1x USB type-A for touch screen control (Optional)
序列埠	1 x RS232 D-sub9 for touch screen control (Optional)	影像	1x VGA input 1x HDMI input (Optional)
指示燈	1 x LED Indicator for power 1 x LED Indicator for status		
控制			
按鈕	1 x Power Button 1 x Adjust up button 1 x Adjust down button 1 x ESC (Auto) button 1 x Menu button		
配件			
配件	Open Wire Cable with terminal block connector	配件選配	Yoke mount stand (Optional)


External VGA cable
Driver CD & Manual
VESA screws

100~240V AC to DC Adapter with power cord
(Optional)
External USB/COM cable for touchscreen control
(Optional)
External HDMI cable (Optional)

系統規格

DIMENSIONS UNIT:MM

Winmate R15L100-VMC3(HB)

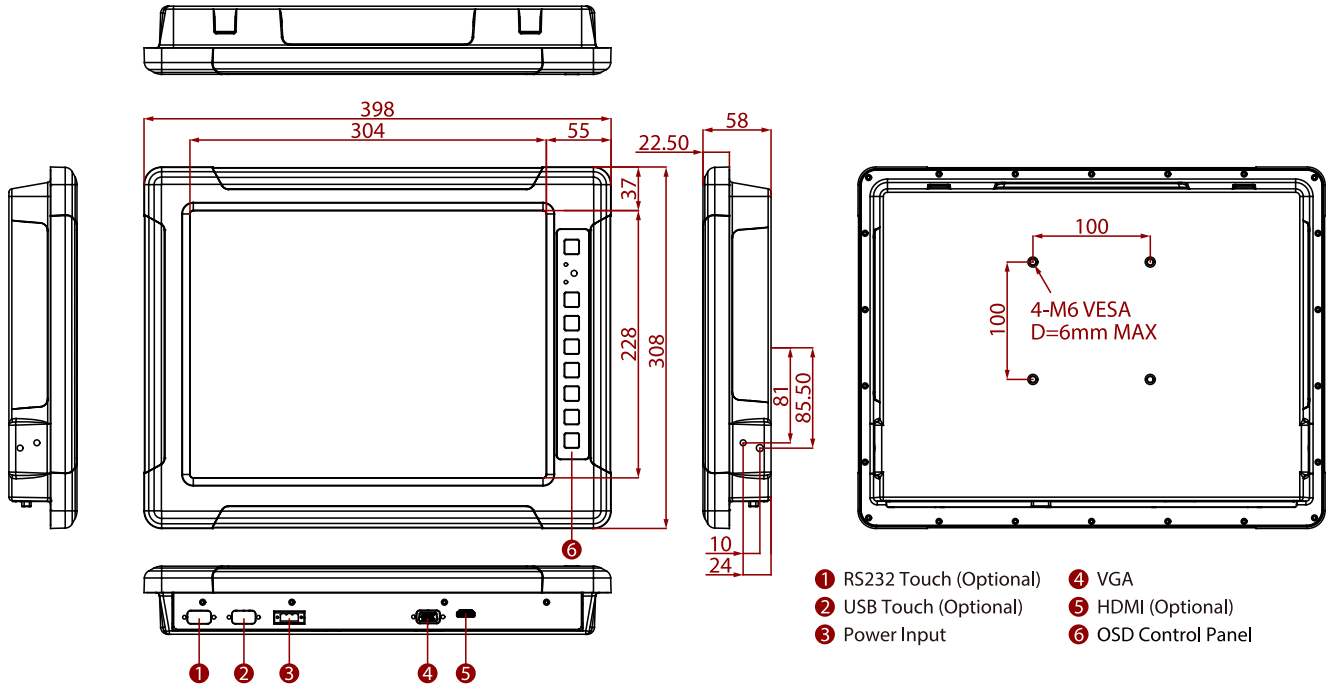

NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.
3. All specifications are subject to change without prior notice.