

R15RK3S-EHC3

15" ARM A72+A53 E系列人機介面工業電腦



KEY FEATURES

- 15" 1024 x 768 解析度, 投射電容式多點觸控(PCAP)
- ARM® Dual-core A72 up to 2.0 GHz + Quad-core A53 up to 1.5 GHz 處理器
- 無風扇冷卻系統和超低功耗
- 前面板IP65防水防塵
- 1 x USB 3.0, 1 x USB 2.0; 1 x RS232/422/485; 1 x RJ45; 1 x Micro SD Slot; 1 x Micro HDMI; 1 x USB OTG
- 支持PoE功能



SPECIFICATIONS

系統規格			
處理器	ARM A72 (up to 2.0 GHz) + ARM A53 (up to 1.5 GHz)	記憶體	2GB LPDDR3L 1600 4GB (Optional)
儲存空間	Onboard 16GB eMMC Onboard 32GB eMMC (Optional) Micro SD Card SDHC (Optional)	作業系統	Android 7.1
無線通訊網路	Support (Optional)	藍牙	Support (Optional)
顯示器			
解析度	1024x768	尺寸	15 inches
對比度	2000:1	面板亮度	300 nits
可視角	88,88,88,88	可視區	304.1x228.1 mm
類型	Projected Capacitive Multi Touch Screen		
機構			
外觀尺寸	353 x 277 x 42 mm	安裝	Panel mount VESA Mount
外殼	Plastic Front Bezel with Metal Back Cover	冷卻系統	Fanless design
嵌入尺寸	336x266mm		
環境			
工作濕度	10% to 90% (non-condensing)	工作溫度	0~50°C
儲存溫度	-20~60°C	IP防水等級	Front IP65
認證			
認證	CE, FCC		
訊號埠			
電源輸入	1 x 12V DC, 3-Pin Terminal Block	USB埠	1 x USB3.0 (Type-A) 1 x USB2.0 (Type-A) 1 x USB OTG
序列埠	1 x RS232/422/485 (Default RS232)	SD卡槽	1 x Micro SD card slot
影像	1 x Micro HDMI (Optional)	擴充端口	1 x M.2 slot(1 for WiFi)
有線網路	1 x LAN RJ45 Connector with PoE(PD, 802.3 at)		
配件			
配件	100~240V AC to DC Adapter Power Cord		

VESA screws
Manual
Mounting clips

電源

電源規格


12V DC

電源適配器

12V 50W

DIMENSIONS UNIT:MM

Winmate R15RK3S-EHC3

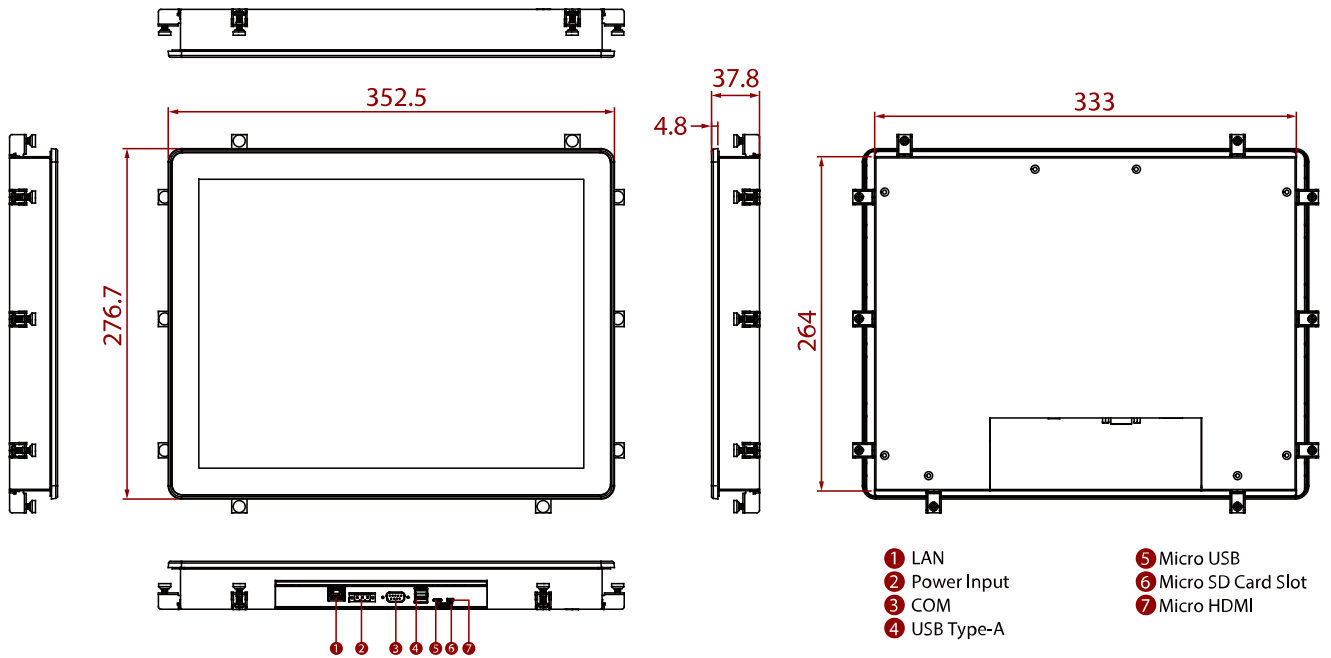

NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.
3. All specifications are subject to change without prior notice.