

R15RK3S-PTC3

15" ARM A72+A53 PT系列人機介面工業電腦



KEY FEATURES

- 15" 1024 x 768 投射電容觸控螢幕
- ARM A72 + A53 處理器
- 無風扇冷卻系統和超低功耗
- 前面板IP65防水防塵
- 真正的平坦, 易於清潔的前表面, 具有邊緣到邊緣的設計



SPECIFICATIONS


顯示器			
解析度	1024x768	尺寸	15.0 inches
對比度	800:1	面版亮度	350 nits
可視角	80,80,70,80	類型	Projected Capacitive Multi Touch Screen
系統規格			
處理器	ARM A72 (up to 2.0 GHz) + ARM A53 (up to 1.5 GHz)	記憶體	2GB LPDDR3L 1600 4GB (Optional)
儲存空間	Onboard 16GB eMMC Onboard 32GB eMMC (Optional) Mico SD Card SDHC (Optional)	作業系統	Android 7.1
環境			
工作濕度	10% to 90% (non-condensing)	工作溫度	0~50°C
儲存溫度	-20~60°C	IP防水等級	Front IP65
認證			
認證	CE, FCC		
機構			
外觀尺寸	352.5 x 276.7 x 45 mm	安裝	VESA Mount (100x100mm, 75x75mm)
外殼	Plastic	冷卻系統	Fanless Design
訊號埠			
USB埠	1 x USB 3.0, 1 x USB 2.0, 1 x USB OTG	序列埠	1 x RS-232/422/485
SD卡槽	1 x Micro SD Card Slot	影像	1 x Micro HDMI (Optional)
音訊	2 x Speaker	有線網路	1 x RJ 45-10/100/1000 Mbps LAN Support PoE function
指示燈	Power LED Indicator		
配件			
配件	Driver CD & User Manual Quick Start Guide(Hardcopy) AC Adapter 12V/50W Power Cord 3 Pin Terminal Block to DC Jack		
電源			
電源規格	12V DC in(Phoenix type)	POE	Power Device (PD), follows IEEE 802.3at (25 W)

控制

按钮	1 x Power Button 1 x Reset Button
----	--------------------------------------

DIMENSIONS UNIT:MM

Winmate R15RK3S-PTC3

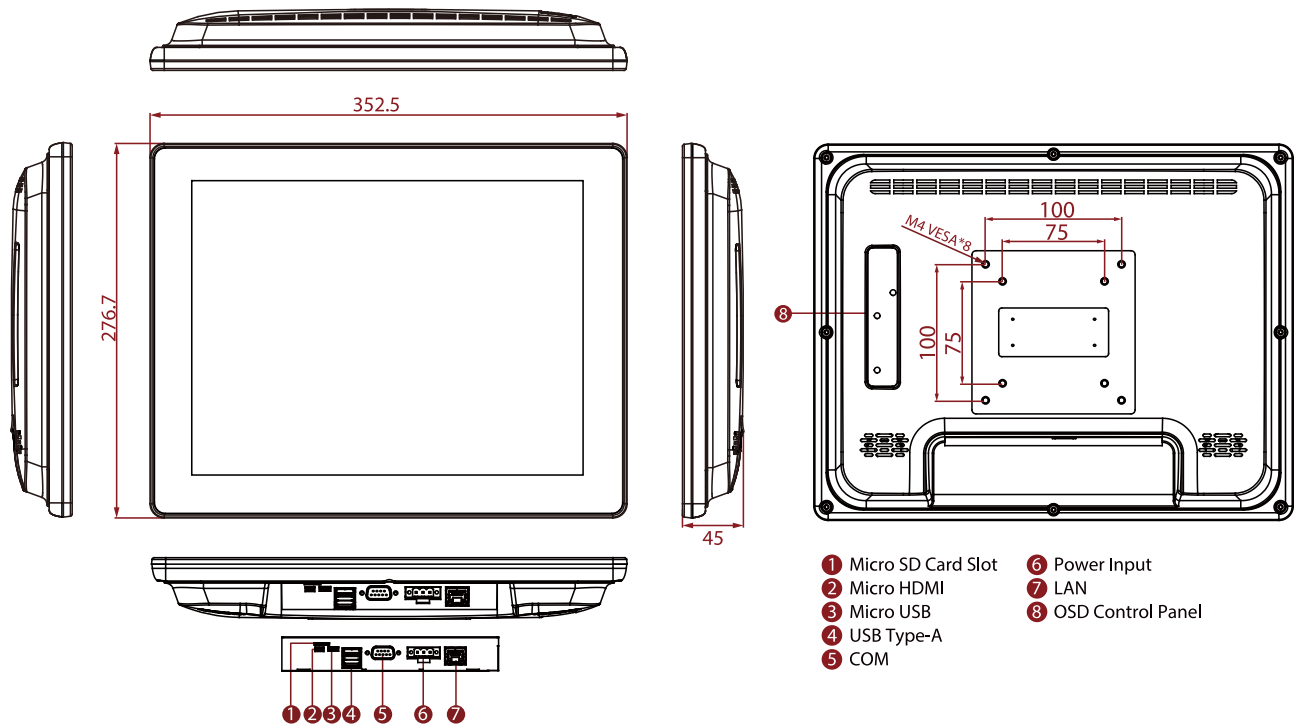

NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. Please contact our sales representative if you need further product information.
3. All specifications are subject to change without prior notice.
4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.