

R17IB7T-RKM1

17" Intel® Celeron® N2930機架式安裝工業電腦



KEY FEATURES

- 17" TFT LCD
- Intel® Celeron® Bay Trail-M N2930, 1.83 GHz 處理器
- SODIMM DDR3L 1600/1333, max. 8 GB
- Intel® I210-AT GbE LAN
- 2 x RS232, 1 x RS232/422/485, 1 x USB 3.0, 3 x USB 2.0, 2 x PS/2, 2 x RJ45, 1 x VGA, 2 x Mini PCIe (1 for WiFi, 1 for 3G Module), 1 x eDP
- 2 x Mini PCIe (1 for WiFi, 1 for 3G Module), 1 x eDP




SPECIFICATIONS

顯示器			
解析度	1280x1024	尺寸	17 inches
對比度	1000:1	面版亮度	350 nits
可視角	85,85,80,80	可視區	337.920x270.336 mm
類型	Resistive Touch Screen Protection Glass w/o Touch Function (Optional)		
系統規格			
處理器	Intel® Celeron® N2930 (2M Cache, up to 2.16 GHz)	記憶體	2 x SO-DIMM, DDR3L 1600 MHz, 4GB 8GB (Optional)
儲存空間	1 x mSATA SSD 64GB mSATA SSD up to 512GB (Optional) 1 x SATA II for 2.5" HDD (Optional)	以太網控制器	2 x Intel® Ethernet Controller I210-AT
作業系統	Windows 7 Embedded Systems (Optional) Windows 10 IoT Enterprise (Optional) Linux Ubuntu 18.04 (Optional)	無線通訊網路	Support (Optional)
藍牙	Support (Optional)		
機構			
外觀尺寸	482.6 x 399 x 92 mm	安裝	VESA Mount Rack Mount(9U)
外殼	Metal Housing	冷卻系統	Fanless design
環境			
工作濕度	10% to 90% (non-condensing)	工作溫度	0~50°C
儲存溫度	-10~60°C		
認證			
認證	CE, FCC		
訊號埠			
電源輸入	1 x 12V DC, Din4 pin connector	USB埠	1 x USB3.0 (Type-A) 3 x USB2.0 (Type-A)
序列埠	1 x RS232/422/485 (Default RS232) 2 x RS232 1 x RS232 (Optional)	影像	1 x VGA
音訊	Mic in Line in	擴充端口	2 x mPCIe slot

	Line out		
有線網路	2 x Giga LAN RJ45 Connector	指示燈	1 x LED Indicator for power 1 x LED Indicator for storage
亮度旋鈕	1 x Brightness Adjustment Knob	PS/2接口	2 x PS/2
mini PCIe	3 x Mini PCIe		
控制			
按鈕	1 x Power Button 1 x Reset Button		
配件			
配件	100~240V AC to DC Adapter Power Cord Driver CD & Manual VESA screws		
電源			
電源規格	12V DC (Lockable Power Jack)	電源適配器	12V 84W

DIMENSIONS UNIT:MM

Winmate R171B7T-RKM1

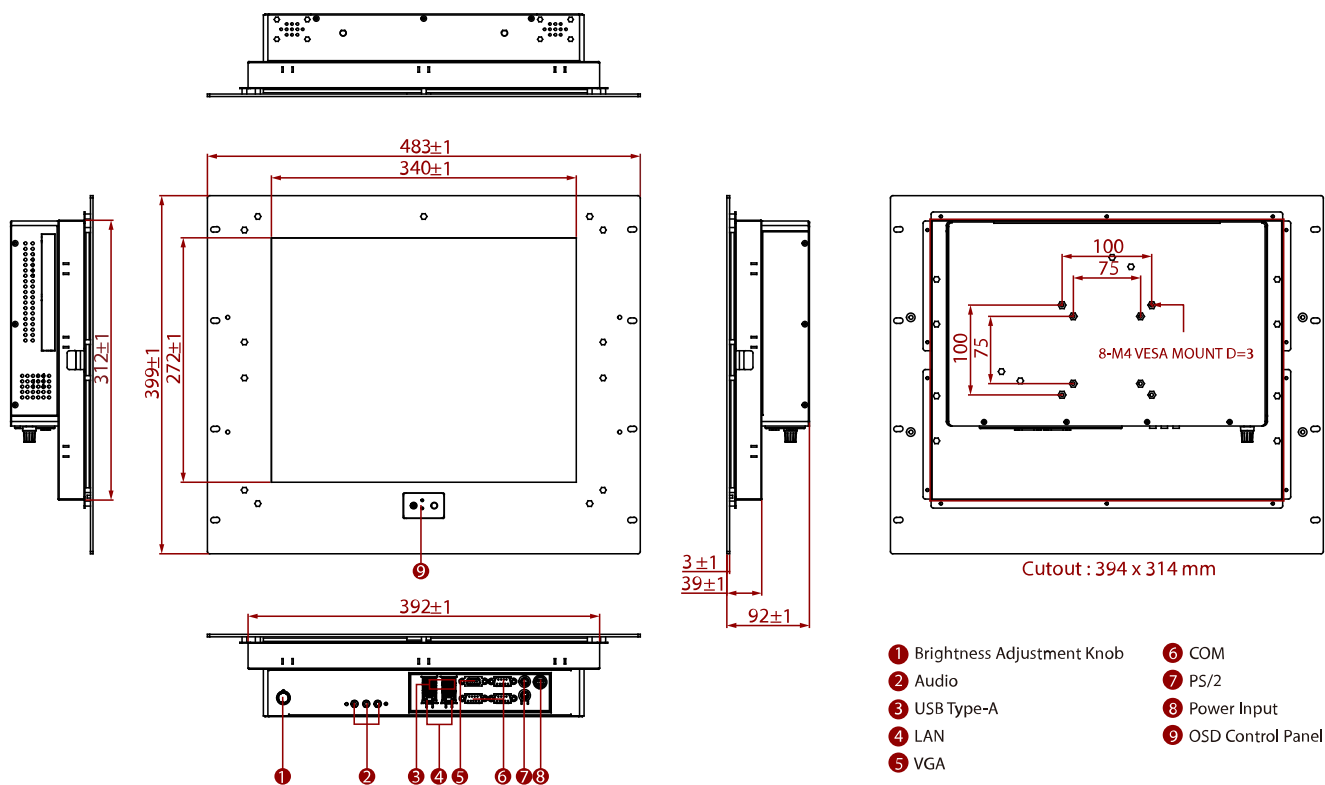

NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. Please contact our sales representative if you need further product information.
3. All specifications are subject to change without prior notice.
4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.