

R19L100-MLA3

19" G-WIN軍規等級顯示器



KEY FEATURES

- 19" 1280 x 1024 解析度
- 符合MIL-STD 810G / MIL-STD 461E
- 無風扇、流線型外殼, 可實現高效散熱
- 便捷的螢幕顯示控制
- 寬工作溫度-40°C~70°C
- 電源輸入 9~36 V DC 帶隔離
- 支持 VESA 安裝
- 內置智能加熱器設計
- 支持 PIP 功能



SPECIFICATIONS

顯示器			
解析度	1280x1024	尺寸	19 inches
對比度	1000:1	面版亮度	350 nits
色階	16.7M Colors	可視角	85,85,80,80
可視區	376.32x301.06 mm	類型	AR Protection Glass 5 Wires Resistive Touch (Optional) 5 Wire Resistive with EMI Mesh Filter (Optional) EMI Glass (Optional)
環境			
工作濕度	10% to 95% RH	工作溫度	-40°C~70°C
儲存溫度	-40°C~70°C	衝擊	Operating:30g for 18ms
振動	Operating: 1.60/1.96/2.18 g rms for XYZ / 5-500Hz		
符合法規			
MIL-STD 461E/F	RE101 / RE102 CE101 / CE102 with EMI Glass / Touch(Optional) RS101 / RS 103 CS101 / CS 106 / CS 109 / CS 114 / CS 115 / CS 116	MIL-STD 810F/G	Vibration Method 514.5 Humidity Method 507.4 Transit Drop Method 516.5
認證			
認證	CE, FCC		
訊號埠			
序列埠	1 x RS232 Remote Control (Optional)	影像	1 x D-Sub 15 VGA 1 x DVI-D
機構			
外觀尺寸	474 x 410 x 111 mm	安裝	VESA Mount/ Wall Mount
外殼	Metal Housing with Aluminum Bezel	冷卻系統	Fanless Design
配件			
配件	User Manual AC Adapter 12V/ 84W Open Wire Cable Power Converter Cable, 0.15m		

VGA, 1.8m
 DVI Cable, 1.8m
 COM Cable, 1.8m


電源

電源規格 9~36V DC Power input with isolation

控制

按鈕 8 key:
 Power
 Menu
 Auto
 Volume Up/ Swap
 Volume Down/ PIP
 Brightness Up
 Brightness Down
 LED Adjustment

DIMENSIONS UNIT:MM

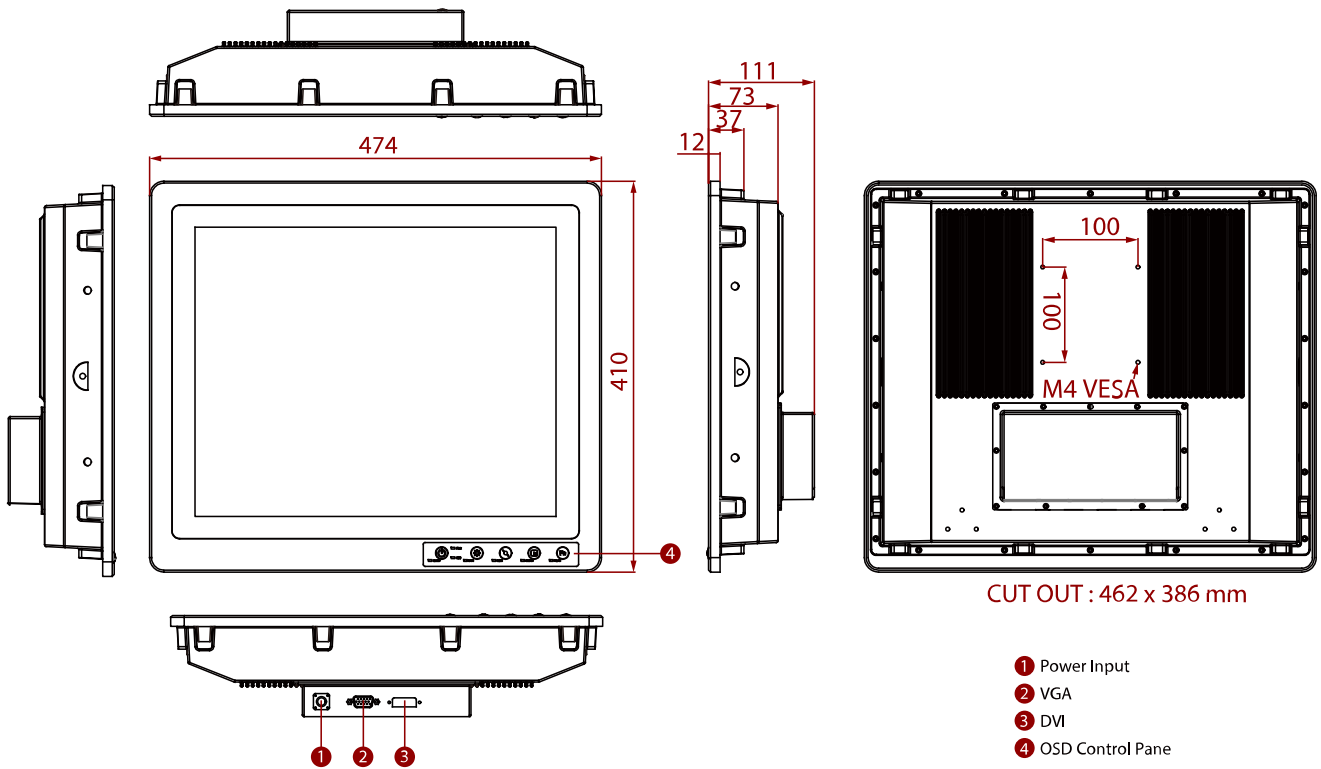

NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. If you require an external test report, Winmate will charge an NRE fee.
3. Please contact our sales representative if you need further product information.
4. All specifications are subject to change without prior notice.
5. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.