

W10RK3S-EHH2

10.1" ARM A72+A53 E系列人機介面工業電腦



KEY FEATURES

- 10.1" 1280 x 800 分辨率, 投射電容式多點觸控 (PCAP)
- ARM® Dual-core A72 up to 2.0 GHz + Quad-core A53 up to 1.5 GHz 處理器
- 無風扇冷卻系統和超低功耗
- 前面板IP65防水防塵
- 1 x USB 3.0, 1 x USB 2.0; 1 x RS232/422/485; 1 x RJ45; 1 x Micro SD Slot; 1 x Micro HDMI; 1 x USB OTG
- 支持PoE功能



SPECIFICATIONS


系統規格			
處理器	ARM A72 (up to 2.0 GHz) + ARM A53 (up to 1.5 GHz)	記憶體	2GB LPDDR3L 1600 4GB (Optional)
儲存空間	Onboard 16GB eMMC Onboard 32GB eMMC (Optional) Micro SD Card SDHC (Optional)	作業系統	Android 7.1
無線通訊網路	Support (Optional)	藍牙	Support (Optional)
顯示器			
解析度	1280x800	尺寸	10.1 inches
對比度	800:1	面板亮度	350 nits 1000 nits(Optional)
可視角	85,85,85,85	可視區	216.96 x135.6 mm
類型	Projected Capacitive Multi Touch Screen		
機構			
外觀尺寸	267 x 182 x 58 mm	安裝	Panel mount VESA Mount (Optional)
外殼	Metal Housing	冷卻系統	Fanless design
嵌入尺寸	244x159mm		
環境			
工作濕度	10% to 90% (non-condensing)	工作溫度	0~50°C
儲存溫度	-20~60°C	IP防水等級	Front IP65
認證			
認證	CE, FCC		
訊號埠			
電源輸入	1 x 12V DC, 3-Pin Terminal Block	USB埠	1 x USB3.0 (Type-A) 1 x USB2.0 (Type-A) 1 x USB OTG
序列埠	1 x RS232/422/485 (Default RS232)	SD卡槽	1 x Micro SD card slot
影像	1 x Micro HDMI (Optional)	擴充端口	1 x M.2 slot(1 for WiFi)
有線網路	1 x LAN RJ45 Connector with PoE(PD, 802.3 at)		
配件			
配件	100~240V AC to DC Adapter		

Power Cord
 VESA screws
 Manual
 Mounting clips

電源			
電源規格	12V DC	電源適配器	12V 50W

DIMENSIONS UNIT:MM

Winmate W10RK3S-EHH2

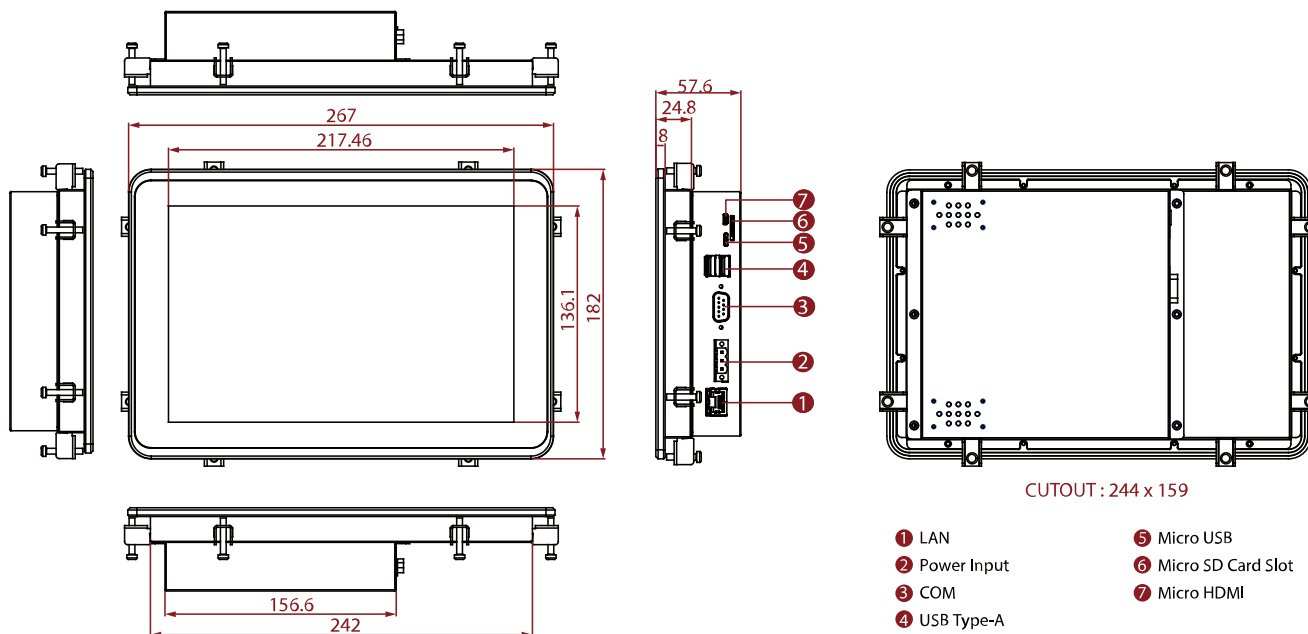

NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.
3. All specifications are subject to change without prior notice.