

# W22L100-MLA3FP

## 21.5" 投射電容機架式軍規等級顯示器



### KEY FEATURES

- 21.5", 1920 x 1080 解析度
- 投射電容多點觸控螢幕
- 符合 MIL-STD 810G/ MIL-STD 461E
- 機架式機械設計, 支持VESA安裝
- 軍規級電源連接器 (MIL-DTL-38999/1)
- AC 100~240V, 通用,  $\pm 10\%$ ; DC 9~36V,  $\pm 10\%$  (可選)
- 方便的螢幕顯示控制



### SPECIFICATIONS

顯示器			
解析度	1920x1080	尺寸	21.5 inches
對比度	3000:1	面版亮度	250 nits
色階	16.7M Colors	可視角	89,89,89,89
可視區	476.64x268.11 mm	類型	Projected Capacitive Multi Touch Screen PCAP with With ITO Flim (Optional)
環境			
工作濕度	10% to 95% RH	工作溫度	0~50°C
儲存溫度	-10°C~60°C		
符合法規			
MIL-STD 461E/F	RE101 / RE102 CE101 / CE102 with EMI Glass / Touch(Optional) RS101 / RS 103 CS101 / CS 106 / CS 109 / CS 114 / CS 115 / CS 116	MIL-STD 810F/G	Vibration Method 514.5 Humidity Method 507.4 Transit Drop Method 516.5
認證			
認證	CE, FCC		
訊號埠			
USB埠	1 x USB for Touch	影像	1 x VGA 5 x BNC (R,G,B,H,V) 1 x DVI-D
機構			
外觀尺寸	580 x 384 x 71 mm	安裝	Rack Mount/ VESA Mount
外殼	Metal Housing with Aluminum Bezel	冷卻系統	Fanless Design
配件			
配件	1 x User Manual(Hardcopy) 1 x Power Cord MIL-DTL-38999/1 1 x VGA Cable 1 x DVI Cable 1 x VGA to 5 BNC Shielding Cable		
電源			
電源規格	AC 100~240V, Universal, $\pm 10\%$		


DC 9~36V, ±10% (Optional)

## 控制

### 按钮

7 key:  
Power  
Decrease  
Increase  
Exit/ Auto  
Menu  
Day/ Night  
Lock/ Unlock

## DIMENSIONS UNIT:MM

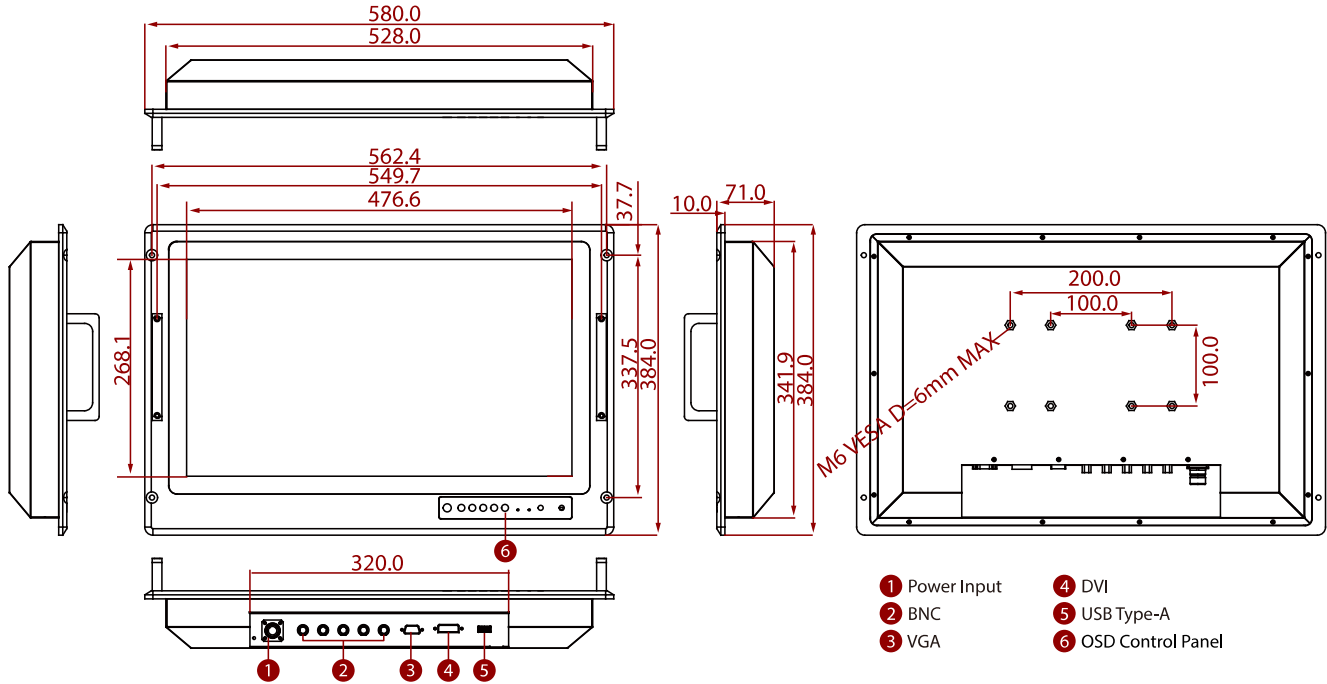

## NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. If you require an external test report, Winmate will charge an NRE fee.
3. Please contact our sales representative if you need further product information.
4. All specifications are subject to change without prior notice.
5. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.