

W22L100-SPA369

21.5" IP69K 投射電容機箱式不銹鋼顯示器



KEY FEATURES

- 21.5英寸, 1920 x 1080, 平面設計的投射電容觸控
- 完整IP69K防水外殼, 良好的耐腐蝕性
- SUS 316 / AISI 316不銹鋼, 用於食品和化學工業
- 支持VESA / YOKE安裝
- 光學貼合(可選)




SPECIFICATIONS

顯示器			
解析度	1920x1080	尺寸	21.5 inches
對比度	3000:1	面版亮度	250 nits
色階	16.7M Colors	可視角	89,89,89,89
可視區	476.64x268.11 mm	類型	Projected Capacitive Multi Touch Screen
機構			
外觀尺寸	541 x 337 x 56.2 mm	安裝	VESA Mount Yoke Mount
外殼	Stainless Housing	冷卻系統	Fanless design
環境			
工作濕度	10% to 90% (non-condensing)	工作溫度	0~45°C
儲存溫度	-20~60°C	IP防水等級	IP69K
認證			
認證	CE, FCC		
訊號埠			
USB埠	1 x M12 waterproof connector for touch screen control	影像	1x M12 type connector for VGA input 1x waterproof connector for DVI input (Optional) 1x waterproof connector for HDMI input (Optional)
指示燈	1 x LED Indicator for power 1 x LED Indicator for status		
控制			
按鈕	1 x Power Button 1 x Adjust up button 1 x Adjust down button 1 x ESC (Auto) button 1 x OK (Menu) button		
配件			
配件	100~240V AC to DC Adapter with waterproof connector Power Cord External USB cable with waterproof connector for touchscreen control External VGA cable with waterproof connector Waterproof caps Manual	配件選配	External HDMI cable with waterproof connector (Optional) External DVI cable with waterproof connector (Optional)

電源	
電源規格	12V DC (M12 type)

DIMENSIONS UNIT:MM

Winmate W22L100-SPA369

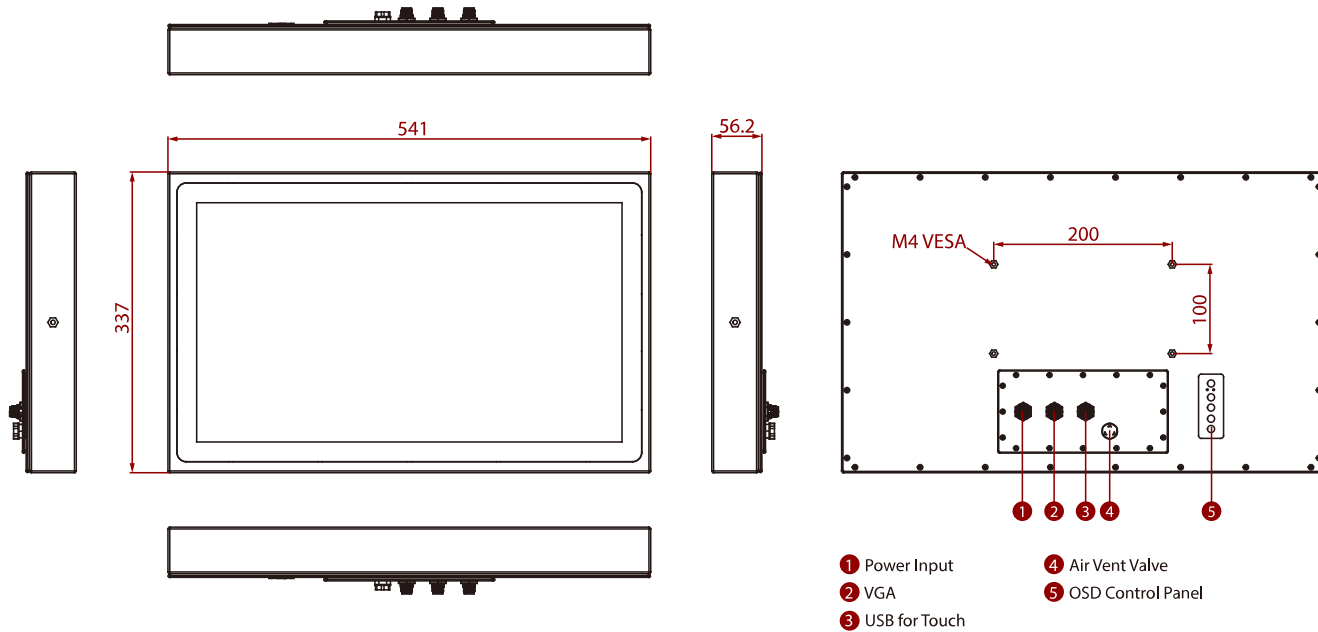

NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. Please contact our sales representative if you need further product information.
3. All specifications are subject to change without prior notice.
4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.