

M320TF

32" 4K UHD彩色手術顯示器



KEY FEATURES

- 32" UHD 4K 顯示器, 具(3840 x 2160)原始解析度。
- 薄型設計, 具有耐衝擊的邊框。
- 3D LUT色彩查找表工具, 提供醫管系統調校使用。
- 內置立體聲揚聲器和3.5mm 輸入和輸出插孔, 減輕外接揚聲器系統整合問題。
- 無風扇設計, 易於清潔。
- 可與現有的成像系統兼容。
- 具抗菌表面塗層。
- 3D LUT配置文件選擇, 可選DICOM。




SPECIFICATIONS

顯示器			
類型	Projected Capacitive Multi Touch Screen AR Glass (Optional)	解析度	3840x2160
尺寸	32 inches	對比度	1000:1
面版亮度	350 nits 700 nits(Optional)	色階	1.07B Colors
可視角	89,89,89,89	可視區	708.48 x 398.52 mm
環境			
工作濕度	10% to 90% RH, non-condensing	工作溫度	0°C to 35°C
儲存溫度	-20 °C to 60 °C		
認證			
認證	IEC 60601-1:2005 + A1:2012 (Ed. 3.1) IEC 60601-1-6:2010 + A1:2013 (Ed. 3.1) IEC 62366:2007 + A1:2014 (Ed. 1.1) ANSI/AAMI ES60601-1:2005/A1:2012 and C1:2009/(R)2012 and A2:2010/(R)2012 CAN/CSA-C22.2 No.60601-1:14 EN 60601-1-2:2015, IEC 60601-1-2:2014 (Ed. 4.0) EN 55032/EN 55024, FCC part 15B EN 62368-1:2014 RoHS-2, REACH, WEEE compliant		
訊號埠			
USB埠	1 x USB 2.0	序列埠	1 x RS-232
影像	1 x Dual DVI In 1 x DP 1.2 Out 1 x DP 1.2 In 1 x VGA In 1 x SDI in 1 x SDI out 1 x HDMI 1.4 (Optional) 1 x HDMI 2.0 (Optional)	音訊	1 x Mic In 1 x Line Out 2 x Speaker
有線網路	1 x RJ-11	控制面板	Capacitive OSD : Power On/Off, On Screen Display Menu,Enter,Brightness Control (-/+)
機構			
外觀尺寸	777.58 x 477.62 x 48 mm	安裝	VESA Mount

外殼	Metal Housing with Aluminum Bezel	冷卻系統	Fanless Design
配件	Remote Control User Manual M4 VESA Mounting Screws 24 Volt Power Supply Power Cable 1.8m VGA Cable DVI Cable 1.8 m SDI Cable DC Jack to Open Wire Cable	配件選配	USB Cable for Touch (Optional)
電源			
電源規格	24V DC in		

DIMENSIONS UNIT:MM

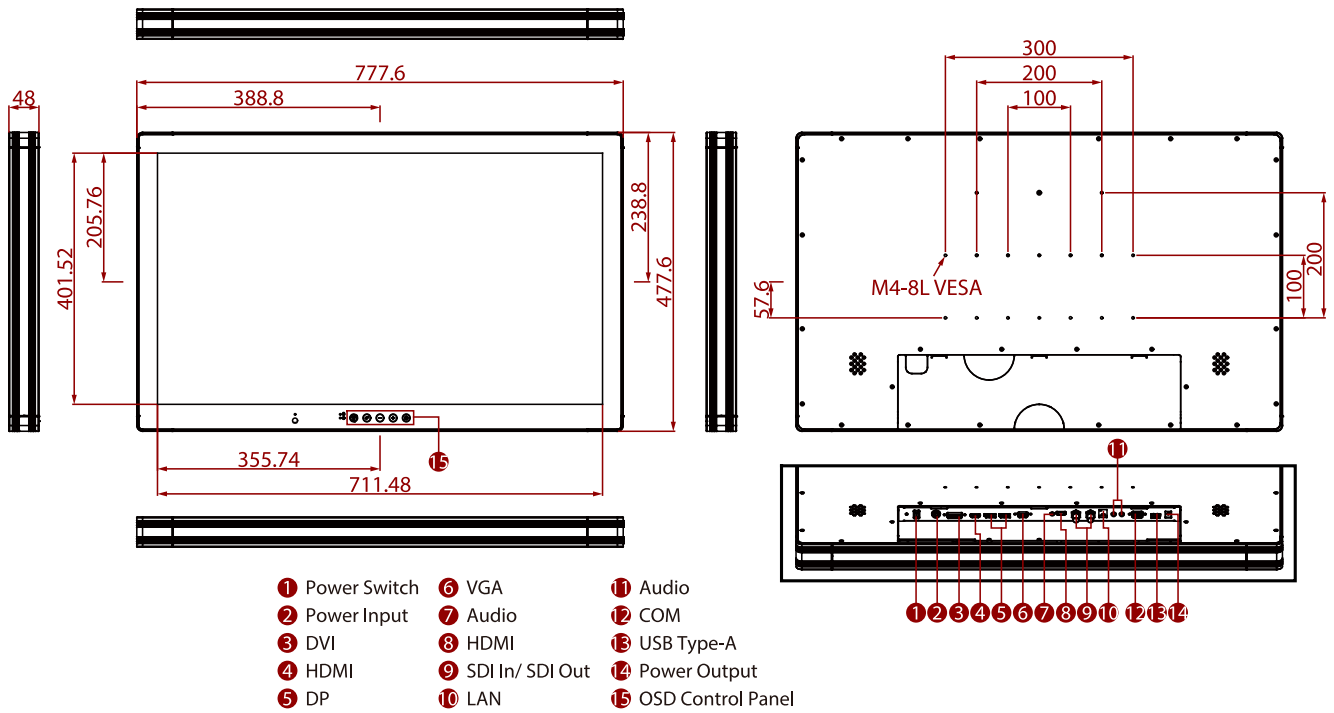

NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. Please contact our sales representative if you need further product information.
3. Please use cables that meet the SDI requirements. Recommend to use 75 Ohm RG59 cable or above for HD-SDI and 75Ohm RG6 cable for 3G-SDI.
4. All specifications are subject to change without prior notice.
5. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.