

R10IP8M-RTT2GP

10.4" Intel® Pentium® N4200 超強固型平板電腦



KEY FEATURES

- Intel® Pentium® N4200 Apollo Lake 處理器
- 10.4" 1024 x 768 解析度 半透射TFT-LCD面板
- 塑料前蓋和鋁鎂合金, 後蓋帶保護橡膠
- 可信平台模塊 (TPM) V2.0
- 內置無線/藍牙/GPS
- 可選 4G LTE
- 可調式支架手柄 (可選)



SPECIFICATIONS

顯示器			
解析度	1024x768	尺寸	10.4 inches
對比度	1000:1	面版亮度	700 nits
可視角	88,88,88,88	類型	Resistive Touch Screen Protection Glass Without Touch Function (Optional)
系統規格			
處理器	Intel® Pentium® N4200 (2M Cache, up to 2.5 GHz)	記憶體	1 x SO-DIMM, DDR3L 1600 MHz, 4GB 8GB (Optional)
儲存空間	1 x M.2 2242 SSD 128GB M.2 2242 SSD up to 512GB (Optional)	以太網控制器	2 x Intel® Ethernet Controller I210-AT
安全支援	TPM 2.0	作業系統	Windows 10 IoT Enterprise (Optional) Linux Ubuntu 18.04 (Optional) Linux Ubuntu 20.04 (Optional)
無線通訊網路	Wi-Fi Support	藍牙	BT Support
無線廣域網路	4G/ LTE or 3G (Optional)	全球定位系統	Supports GPS GLONASS, Galileo, BeiDou) (Optional)
機構			
外觀尺寸	266 x 224 x 50.4 mm	重量	2.39kg
安裝	VESA Mount	外殼	Magnesium Alloy & ABS+PC
冷卻系統	Fanless design		
環境			
工作濕度	10% to 90% RH, non-condensing	工作溫度	-10°C to 50°C (14°F to 122°F) (Battery mode) -20°C to 60°C (4°F to 158°F) (AC mode)"
儲存溫度	-20°C to 60°C	衝擊	MIL-STD-810G Method 516.6
振動	MIL-STD-810G Method 514.6	IP防水等級	IP54
落摔	MIL-STD-810G Method 516.6, 4ft to concrete		
認證			
認證	CE, FCC		
訊號埠			
USB埠	2 x USB3.0 (Type-A)	序列埠	1 x RS232/422/485 (Default RS232)

SD卡槽	1 x Micro SD card Slot	SIM卡槽	1 x Micro SIM card Slot
音訊	1 x Audio Combo Connector (Mic in / Line Out) 2 x Speaker	有線網路	1 x Giga LAN RJ45 Connector
指示燈	1 x LED Indicator for power 1 x LED Indicator for HDD 1 x LED Indicator for Battery status 1 x LED Indicator for Wifi		

配件	100~240V AC to 19V DC 65W Adapter Power Cord 11.1V / 5200mAh Battery Driver CD & Manual Quick Start Guide Stylus	配件選配	Adjustable Kickstand (Optional) Multi-functional Desktop Docking station (Optional) Vehicle Mounting Charger Kit (Optional) Car Power Charger (Optional) Hand Strap (Optional) Shoulder Strap (Optional) Soft Shell Case (Optional) Carry Bag (Optional)
-----------	---	-------------	---

條碼掃描


配件	2D Barcode Reader (Optional)
-----------	------------------------------

鏡頭

前鏡頭	2MP Camera (Optional)	後鏡頭	5MP Autofocus Camera (Optional)
------------	-----------------------	------------	---------------------------------

DIMENSIONS UNIT:MM

Winmate R10IP8M-RTT2GP

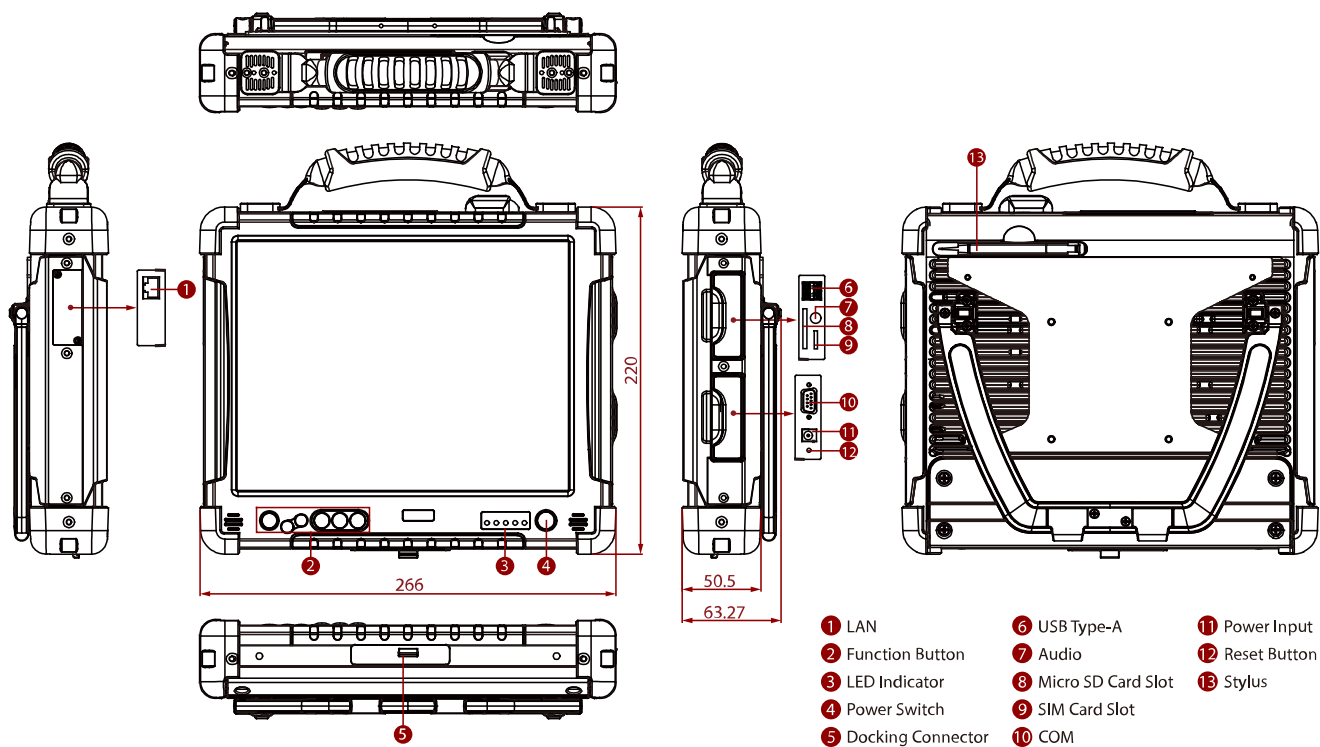

NOTE

1. Measured at dimming LCD brightness. Varies depending on the usage conditions, or when an external device is attached.
2. This is a simplified drawing and some components are not marked in detail.
3. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.