

R15L600-65A1FTP

15" IP65 投射電容機箱式不銹鋼顯示器



KEY FEATURES

- 符合NEMA 4 IP65
- 堅固且無風扇的設計可確保可靠的運行
- 無風扇冷卻系統和超低功耗
- 不銹鋼外殼, 適用於食品和醫療行業
- 特殊的平面觸控設計易於維護
- 投射電容式觸控
- 光學貼合(可選)



SPECIFICATIONS

顯示器			
解析度	1024x768	尺寸	15 inches
對比度	2500:1	面版亮度	500 nits
色階	16.7M Colors	可視角	88,88,88,88
可視區	304.1x228.1 mm	類型	Projected Capacitive Multi Touch Screen
機構			
外觀尺寸	396 x 310 x 49 mm	安裝	VESA Mount
外殼	Stainless Housing	冷卻系統	Fanless design
環境			
工作濕度	10% to 90% (non-condensing)	工作溫度	0~45°C
儲存溫度	-20~60°C	IP防水等級	IP65
認證			
認證	CE, FCC		
訊號埠			
電源輸入	1 x M12 waterproof connector for 12V DC	USB埠	1x M12 waterproof connector for touch screen control
序列埠	1 x M12 type connector for RS232 remote control (Optional)	影像	1x M12 type connector for VGA input
指示燈	1 x LED Indicator for power 1 x LED Indicator for status		
控制			
按鈕	1 x Power Button 1 x Adjust up button 1 x Adjust down button 1 x ESC (Auto) button 1 x OK (Menu) button		
配件			
配件	External VGA cable with waterproof connector Waterproof caps Manual VESA screws 100~240V AC to DC Adapter with waterproof connector Power Cord	配件選配	External COM cable with waterproof connector for remote control (Optional)


電源

電源規格

12V DC (M12 type)

DIMENSIONS UNIT:MM

Winmate R15L600-65A1FTP

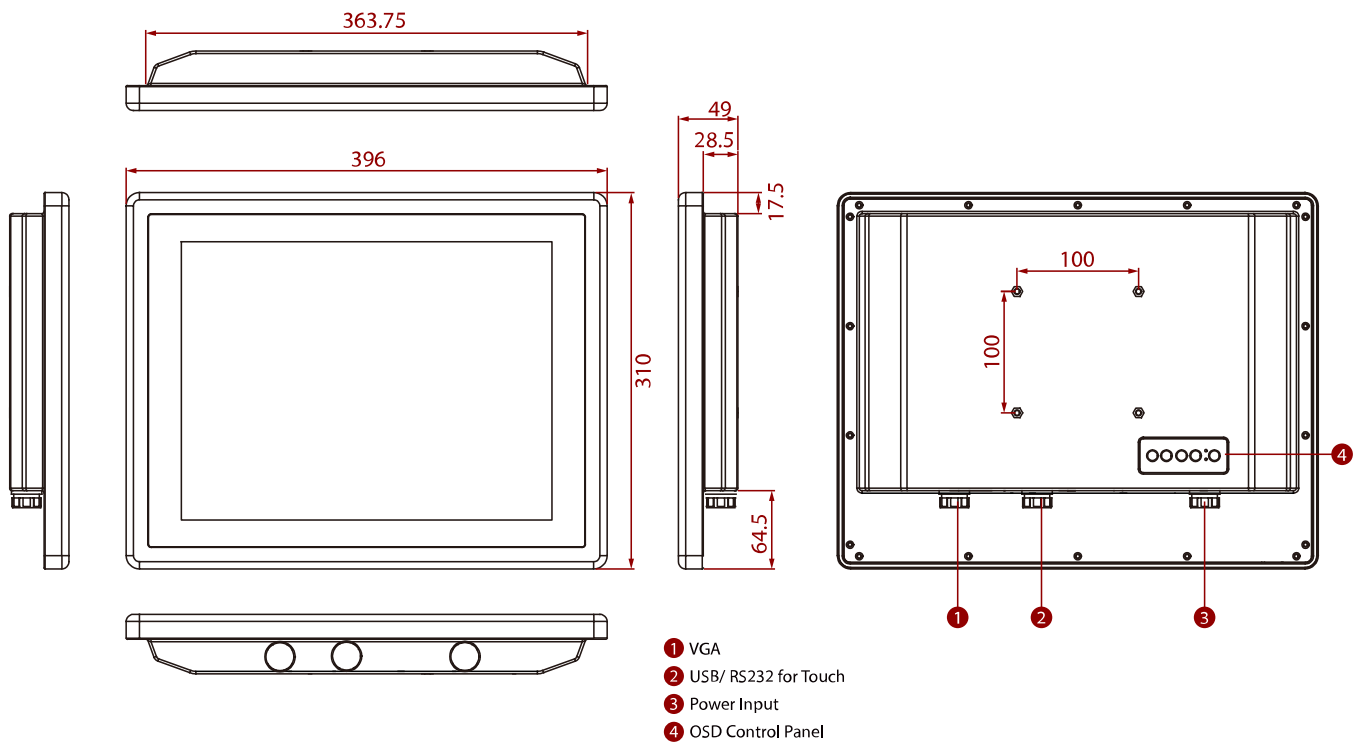

NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. Please contact our sales representative if you need further product information.
3. All specifications are subject to change without prior notice.
4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.