

# R15L600-65C3

## 15" IP65電阻機箱式不銹鋼顯示器



### KEY FEATURES

- 15", 1024 x 768
- 支持VESA / YOKE安裝
- 機箱式設計
- 不銹鋼外殼SUS 316 / AISI 316
- 完整IP65防水防塵
- 光學貼合(可選)



### SPECIFICATIONS

顯示器			
解析度	1024x768	尺寸	15 inches
對比度	2000:1	面版亮度	300 nits
色階	16.2M Colors	可視角	88,88,88,88
可視區	304.1x228.1 mm	類型	Resistive Touch Screen Protection Glass Without Touch Function (Optional)
機構			
外觀尺寸	378 x 301 x 60 mm	安裝	VESA Mount Yoke Mount
外殼	Stainless Housing	冷卻系統	Fanless design
環境			
工作濕度	10% to 90% (non-condensing)	工作溫度	0~45°C
儲存溫度	-20~60°C	IP防水等級	IP65
認證			
認證	CE, FCC		
訊號埠			
電源輸入	1 x M12 waterproof connector for 12V DC	USB埠	1x M12 waterproof connector for touch screen control (Optional)
序列埠	1 x M12 waterproof connector for touch screen control (Optional)	影像	1x M12 type connector for VGA input 1x waterproof DVI input (Optional) 1x waterproof connector for HDMI input (Optional)
指示燈	1 x LED Indicator for power 1 x LED Indicator for status		
控制			
按鈕	1 x Power Button 1 x Adjust up button 1 x Adjust down button 1 x ESC (Auto) button 1 x OK (Menu) button		
配件			
配件	100~240V AC to DC Adapter with waterproof connector Power Cord	配件選配	Yoke mount stand (Optional) External HDMI cable with waterproof connector (Optional)

External VGA cable with waterproof connector  
Waterproof caps  
Manual  
VESA screws


External DVI cable with waterproof connector (Optional)  
External USB cable with waterproof connector for touchscreen control (Optional)  
External RS232 cable with waterproof connector for touchscreen control (Optional)

## 電源

電源規格 12V DC (M12 type)

## DIMENSIONS UNIT:MM

### Winmate R15L600-65C3

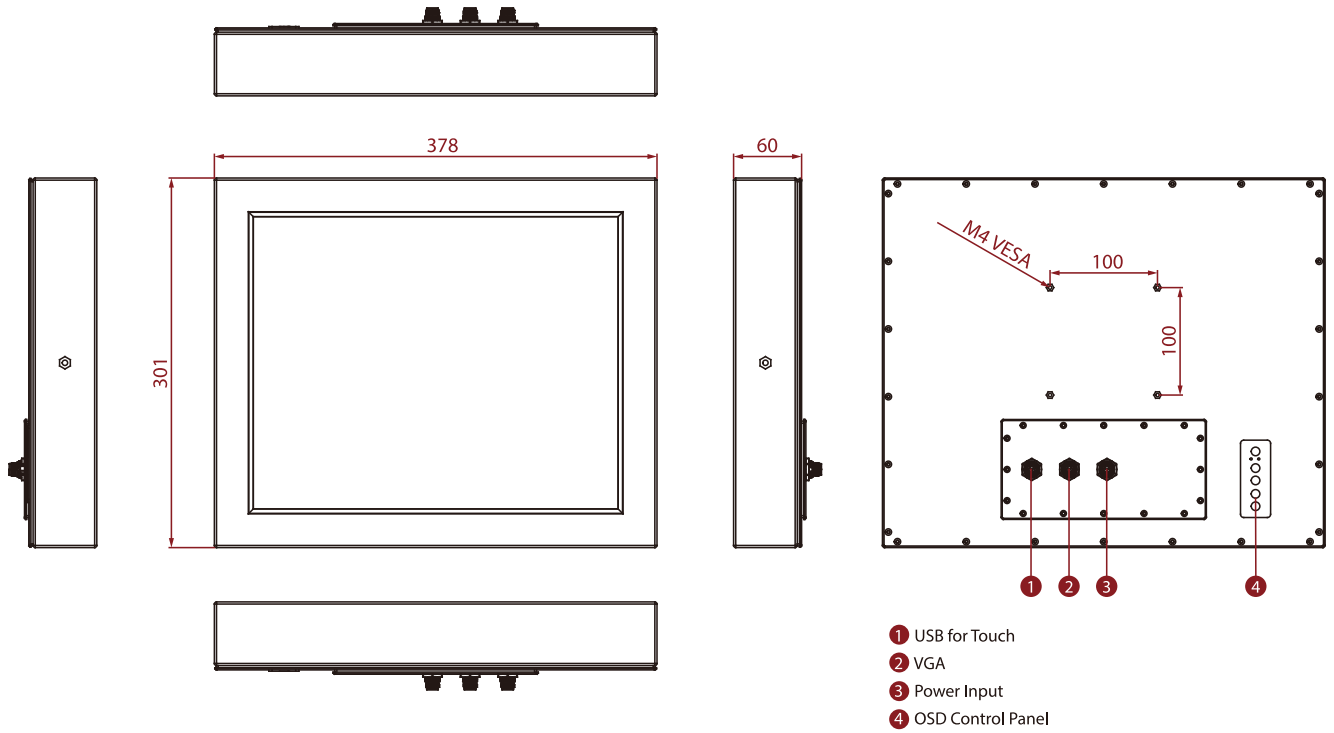

## NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. Please contact our sales representative if you need further product information.
3. All specifications are subject to change without prior notice.
4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.